

INDUSTRIAL COMPRESSED AIR SYSTEM PACKAGES



The compressed air production, storage and treatment equipment represents the bulk of an industrial air system's initial capital cost. And likewise the operation and maintenance of this key equipment contributes most of the system's ongoing running cost.

In the past, it was common practice to select and purchase this key compressed air equipment from different suppliers. Today's business environment, however, demands a more efficient way of procuring the optimum major equipment for a new or upgraded industrial compressed air system.

We have responded to this challenge by assembling an exclusive suite of compressed air system packages. Each unique combination has been carefully selected from an extensive in-house product range to provide the best possible combination of performance, reliability, safety and value for money.

Features

There is a choice of three fundamental package types that satisfy the requirements of most industrial compressed air systems.

Professional Package

This is the recommended minimum standard comprising an oil-lubricated compressor, receiver tank, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for pneumatic tools, air powered machinery, abrasive blasting, powder coating and spray painting.

Ultimate Package

For special applications requiring clean, odourless and oil-free compressed air, this package comprises an oil-free compressor, receiver tank, refrigerant dryer and four stages of filtration. Typical applications include dental and medical facilities, food and beverage processing, and chemical and pharmaceutical manufacturing.

Basic Package

This type should only be considered in those instances where there is no requirement for filtration or drying of the compressed air, such as general cleaning and blowing down, air powered transfer pumping and waste liquid aeration.

Benefits

Convenience

A single point of contact for selection, purchase and whole-of-life support of the compressed air system.

Safety

All of the equipment complies with Australian Workplace Health and Safety Regulations for industrial use.

Performance

The individual equipment items have been performance matched to ensure correct system function.

Value

By sourcing the equipment direct and exclusively from the manufacturers, we're able to offer these packages at very competitive prices nationwide.

Flexibility

The packages can be readily enhanced with additional or upgraded components to suit any special application requirements.

Support

Australia-wide dealer network offering sales, installation, service and genuine spare parts backup.

Confidence

24-month (Airmac, FS-Curtis and Fusheng) or 12-month (Puma and Senator) parts and labour warranty.

The latest energy saving solution for industrial applications with fluctuating compressed air demand up to 15.2 m³/min. Each package comprises a Senator DSV Series variable speed screw compressor, vertical air receiver, refrigerant dryer and two in-line filters. Clean, dry compressed air at low whole-of-life cost.




Senator DSV30-8
Professional Package shown

| Package Product Code | Senator DSV Series Compressor | | | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|-------------------------------|-------------------|-----|-------------|-----|-----------------------------|------------------------------|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | | | |
| | | m³/min | cfm | kW | hp | | | | | |
| SE DSV8-8 PKG | DSV8-8 | 1.02 | 36 | 7.5 | 10 | V300-11-AS | V300-11-AS-K | T10U | FR010A | T10H |
| SE DSV11-8 PKG | DSV11-8 | 1.65 | 58 | 11 | 15 | V300-11-AS | V300-11-AS-K | T15U | FR020A | T15H |
| SE DSV15-8 PKG | DSV15-8 | 2.40 | 85 | 15 | 20 | V300-11-AS | V300-11-AS-K | T20U | FR020A | T20H |
| SE DSV18-8 PKG | DSV18-8 | 2.95 | 104 | 18.5 | 25 | V500-11-AS | V500-11-AS-K | T40U | FR030A | T40H |
| SE DSV22-8 PKG | DSV22-8 | 3.60 | 127 | 22 | 30 | V500-11-AS | V500-11-AS-K | T40U | FR030A | T40H |
| SE DSV30-8 PKG | DSV30-8 | 5.20 | 184 | 30 | 40 | V800-11-AS | V800-11-AS-K | T40U | FR050A | T40H |
| SE DSV37-8 PKG | DSV37-8 | 6.30 | 222 | 37 | 50 | V800-11-AS | V800-11-AS-K | T60U | FR050A | T60H |
| SE DSV45-8 PKG | DSV45-8 | 7.60 | 268 | 45 | 60 | V1000-11-AS | V1000-11-AS-K | T60U | FR075A | T60H |
| SE DSV55-8 PKG | DSV55-8 | 9.60 | 339 | 55 | 75 | V1200-11-GB | V1200-11-GB-K | T75U | FR075A | T75H |
| SE DSV55-10 PKG | DSV55-10 | 8.26 | 292 | 55 | 75 | V1200-11-GB | V1200-11-GB-K | T75U | FR075A | T75H |
| SE DSV75-8 PKG | DSV75-8 | 13.00 | 459 | 75 | 100 | V2000-11-AS | V2000-11-AS-K | T125U | FR100A | T125H |
| SE DSV75-10 PKG | DSV75-10 | 11.18 | 395 | 75 | 100 | V2000-11-AS | V2000-11-AS-K | T125U | FR100A | T125H |
| SE DSV90-8 PKG | DSV90-8 | 15.20 | 537 | 90 | 120 | V2000-11-AS | V2000-11-AS-K | T175U | FR150A | T175H |
| SE DSV90-10 PKG | DSV90-10 | 13.07 | 462 | 90 | 120 | V2000-11-AS | V2000-11-AS-K | T175U | FR150A | T175H |

Working pressure: 8 bar (116 psi) or 10 bar (145 psi) as noted above. Other pressures are available as options.

The latest solution from Senator for applications with stable compressed air demand up to 15.2 m³/min. Each package comprises a DS Series screw compressor, vertical air receiver, refrigerant dryer and two in-line filters. Users can depend on these for clean, dry compressed air and low operating noise level.

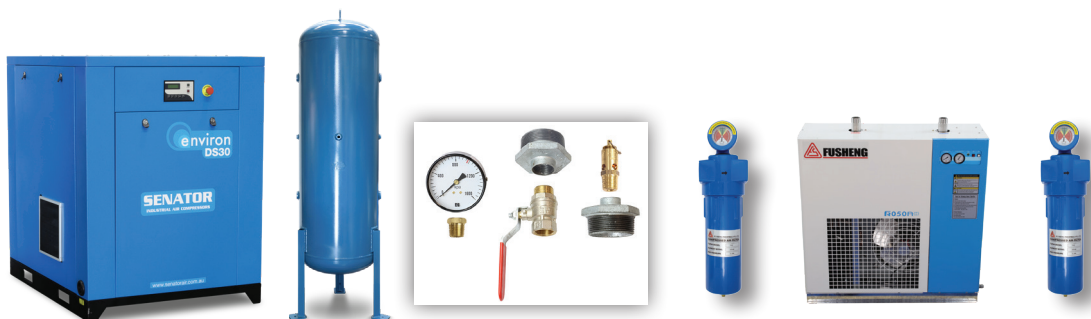

Senator DS30-8
Professional Package shown

| Package Product Code | Senator DS Series Compressor | | | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|------------------------------|-------------------|-----|-------------|-----|-----------------------------|------------------------------|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | | | |
| | | m³/min | cfm | kW | hp | | | | | |
| SE DS4-8 PKG | DS4-8 | 0.50 | 18 | 4 | 5.5 | V300-11-AS | V300-11-AS-K | T5U | FR005A | T5H |
| SE DS6-8 PKG | DS6-8 | 0.75 | 26 | 5.5 | 7.5 | V300-11-AS | V300-11-AS-K | T10U | FR010A | T10H |
| SE DS8-8 PKG | DS8-8 | 1.02 | 36 | 7.5 | 10 | V300-11-AS | V300-11-AS-K | T10U | FR010A | T10H |
| SE DS11-8 PKG | DS11-8 | 1.65 | 58 | 11 | 15 | V300-11-AS | V300-11-AS-K | T15U | FR020A | T15H |
| SE DS15-8 PKG | DS15-8 | 2.40 | 85 | 15 | 20 | V300-11-AS | V300-11-AS-K | T20U | FR020A | T20H |
| SE DS18-8 PKG | DS18-8 | 2.95 | 104 | 18.5 | 25 | V500-11-AS | V500-11-AS-K | T40U | FR030A | T40H |
| SE DS22-8 PKG | DS22-8 | 3.60 | 127 | 22 | 30 | V500-11-AS | V500-11-AS-K | T40U | FR030A | T40H |
| SE DS30-8 PKG | DS30-8 | 5.20 | 184 | 30 | 40 | V800-11-AS | V800-11-AS-K | T40U | FR050A | T40H |
| SE DS37-8 PKG | DS37-8 | 6.30 | 222 | 37 | 50 | V800-11-AS | V800-11-AS-K | T60U | FR050A | T60H |
| SE DS45-8 PKG | DS45-8 | 7.60 | 268 | 45 | 60 | V1000-11-AS | V1000-11-AS-K | T60U | FR075A | T60H |
| SE DS55-8 PKG | DS55-8 | 9.60 | 339 | 55 | 75 | V1200-11-GB | V1200-11-GB-K | T75U | FR075A | T75H |
| SE DS55-10 PKG | DS55-10 | 8.80 | 311 | 55 | 75 | V1200-11-GB | V1200-11-GB-K | T75U | FR075A | T75H |
| SE DS75-8 PKG | DS75-8 | 13.00 | 459 | 75 | 100 | V2000-11-AS | V2000-11-AS-K | T125U | FR100A | T125H |
| SE DS75-10 PKG | DS75-10 | 11.70 | 413 | 75 | 100 | V2000-11-AS | V2000-11-AS-K | T125U | FR100A | T125H |
| SE DS90-8 PKG | DS90-8 | 15.20 | 537 | 90 | 120 | V2000-11-AS | V2000-11-AS-K | T175U | FR150A | T175H |
| SE DS90-10 PKG | DS90-10 | 13.60 | 480 | 90 | 120 | V2000-11-AS | V2000-11-AS-K | T175U | FR150A | T175H |

Working pressure: 8 bar (116 psi) or 10 bar (145 psi) as noted above. Other pressures are available as options.

SENATOR

LSV Series Professional Packages

The smart energy saving solution for industrial applications with fluctuating compressed air demand up to 12.33 m³/min. Each package comprises a Senator LSV Series variable speed screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration. Clean, dry compressed air at the lowest overall cost.



Senator LSV22-8
Professional Package shown



| Package Product Code | Senator LSV Series Compressor | | | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|-------------------------------|-------------------|-----------|-------------|-----|-----------------------------|------------------------------|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | | | |
| | | m³/min | cfm | kW | hp | | | | | |
| SE LSV18-8 PKG | LSV18-8 | 1.08 - 3.08 | 38 - 109 | 18.5 | 25 | V300-11-AS | V300-11-AS-K | T40U | FR030A | T40H |
| SE LSV22-8 PKG | LSV22-8 | 1.25 - 3.58 | 44 - 127 | 22 | 30 | V500-11-AS | V500-11-AS-K | T40U | FR030A | T40H |
| SE LSV30-8 PKG | LSV30-8 | 1.74 - 4.96 | 61 - 175 | 30 | 40 | V500-11-AS | V500-11-AS-K | T40U | FR050A | T40H |
| SE LSV37-8 PKG | LSV37-8 | 2.23 - 6.38 | 79 - 225 | 37 | 50 | V800-11-AS | V800-11-AS-K | T60U | FR050A | T60H |
| SE LSV45-8 PKG | LSV45-8 | 2.51 - 7.18 | 89 - 254 | 45 | 60 | V800-11-AS | V800-11-AS-K | T60U | FR075A | T60H |
| SE LSV55-8 PKG | LSV55-8 | 3.35 - 9.58 | 118 - 338 | 55 | 75 | V1200-11-GB | V1200-11-GB-K | T75U | FR075A | T75H |
| SE LSV75-8 PKG | LSV75-8 | 4.32 - 12.33 | 152 - 435 | 75 | 100 | V1200-11-GB | V1200-11-GB-K | T125U | FR100A | T125H |

Working pressure: 8 bar (116 psi). Other pressures are available as options.

SENATOR

LS Series Professional Packages

Recommended for industrial applications with stable compressed air demand up to 12.33 m³/min. Each package comprises a Senator LS Series screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration. Users can depend on these for clean, dry compressed air and low operating noise level.



Senator LS45-8
Professional Package shown



| Package Product Code | Senator LS Series Compressor | | | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|------------------------------|-------------------|-----|-------------|-----|-----------------------------|------------------------------|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | | | |
| | | m³/min | cfm | kW | hp | | | | | |
| SE LS18-8 PKG | LS18-8 | 3.08 | 109 | 18.5 | 25 | V300-11-AS | V300-11-AS-K | T40U | FR030A | T40H |
| SE LS22-8 PKG | LS22-8 | 3.58 | 127 | 22 | 30 | V500-11-AS | V500-11-AS-K | T40U | FR030A | T40H |
| SE LS30-8 PKG | LS30-8 | 4.96 | 175 | 30 | 40 | V500-11-AS | V500-11-AS-K | T40U | FR050A | T40H |
| SE LS37-8 PKG | LS37-8 | 6.38 | 225 | 37 | 50 | V800-11-AS | V800-11-AS-K | T60U | FR050A | T60H |
| SE LS45-8 PKG | LS45-8 | 7.18 | 254 | 45 | 60 | V800-11-AS | V800-11-AS-K | T60U | FR075A | T60H |
| SE LS55-8 PKG | LS55-8 | 9.58 | 338 | 55 | 75 | V1200-11-GB | V1200-11-GB-K | T75U | FR075A | T75H |
| SE LS75-8 PKG | LS75-8 | 12.33 | 435 | 75 | 100 | V1200-11-GB | V1200-11-GB-K | T125U | FR100A | T125H |

Working pressure: 8 bar (116 psi). Other pressures are available as options.

SENATOR

GSV Series Professional Packages

The smart value choice for energy saving compressed air systems in the 1.10 to 2.45 m³/min range. Each package includes a Senator GSV Series tank-mounted variable speed screw compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for most pneumatic applications.



Senator GSV8-8
Professional Package shown



| Package Product Code | Senator GSV Series Compressor | | | | | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|-------------------------------|-------------------|-------|-------------|----|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | |
| | | m³/min | cfm | kW | hp | | | |
| SE GSV8-8 PKG | GSV8-8 | 0.44 - 1.10 | 16-39 | 7.5 | 10 | T10U | FR010A | T10H |
| SE GSV11-8 PKG | GSV11-8 | 0.71 - 1.78 | 25-63 | 11 | 15 | T15U | FR020A | T15H |
| SE GSV15-8 PKG | GSV15-8 | 0.98 - 2.45 | 35-87 | 15 | 20 | T20U | FR020A | T20H |

Working pressure: 8 bar (116 psi). Other pressures are available as options.

SENATOR

GS Series Professional Packages

The premium value choice for standard industrial compressed air systems in the 0.6 to 2.45 m³/min range. Each package includes a Senator GS Series tank-mounted screw compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for most pneumatic applications.



Senator GS15-8
Professional Package shown



| Package Product Code | Senator GS Series Compressor | | | | | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|------------------------------|-------------------|-----|-------------|-----|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | |
| | | m³/min | cfm | kW | hp | | | |
| SE GS4-8 PKG | GS4-8 | 0.60 | 21 | 4 | 5.5 | T5U | FR005A | T5H |
| SE GS6-8 PKG | GS6-8 | 0.82 | 29 | 5.5 | 7.5 | T10U | FR010A | T10H |
| SE GS8-8 PKG | GS8-8 | 1.10 | 39 | 7.5 | 10 | T10U | FR010A | T10H |
| SE GS11-8 PKG | GS11-8 | 1.78 | 63 | 11 | 15 | T15U | FR020A | T15H |
| SE GS15-8 PKG | GS15-8 | 2.45 | 87 | 15 | 20 | T20U | FR020A | T20H |

Working pressure: 8 bar (116 psi). Other pressures are available as options.

SENATOR

GSV-B Series Professional Packages

The smart value choice for energy saving compressed air systems in the 1.10 to 2.45 m³/min range. Each package includes a Senator GSV-B Series base-mounted variable speed screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for most pneumatic applications.



Senator GSV8-B-8
Professional Package shown



| Package Product Code | Senator GSV-B Series Compressor | | | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|---------------------------------|-------------------|-------|-------------|----|-----------------------------|------------------------------|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | | | |
| | | m³/min | cfm | kW | hp | | | | | |
| SE GSV8-B-8 PKG | GSV8-B-8 | 0.44 - 1.10 | 16-39 | 7.5 | 10 | V300-11-AS | V300-11-AS-K | T10U | FR010A | T10H |
| SE GSV11-B-8 PKG | GSV11-B-8 | 0.71 - 1.78 | 25-63 | 11 | 15 | V300-11-AS | V300-11-AS-K | T15U | FR020A | T15H |
| SE GSV15-B-8 PKG | GSV15-B-8 | 0.98 - 2.45 | 35-87 | 15 | 20 | V300-11-AS | V300-11-AS-K | T20U | FR020A | T20H |

Working pressure: 8 bar (116 psi). Other pressures are available as options.

SENATOR

GS-B Series Professional Packages

The premium value choice for standard industrial compressed air systems in the 0.6 to 2.45 m³/min range. Each package includes a Senator GS-B Series base-mounted screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for most pneumatic applications.



Senator GS15-B-8
Professional Package shown



| Package Product Code | Senator GS-B Series Compressor | | | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 1 Micron Coalescing Filter | Fusheng Refrigerant Dryer | Fusheng 0.01 Micron Coalescing Filter |
|----------------------------|--------------------------------|-------------------|-----|-------------|-----|-----------------------------|------------------------------|---|---------------------------------|--|
| | Model | Free Air Delivery | | Motor Power | | | | | | |
| | | m³/min | cfm | kW | hp | | | | | |
| SE GS4-B-8 PKG | GS4-B-8 | 0.60 | 21 | 4 | 5.5 | V300-11-AS | V300-11-AS-K | T5U | FR005A | T5H |
| SE GS6-B-8 PKG | GS6-B-8 | 0.82 | 29 | 5.5 | 7.5 | V300-11-AS | V300-11-AS-K | T10U | FR010A | T10H |
| SE GS8-B-8 PKG | GS8-B-8 | 1.10 | 39 | 7.5 | 10 | V300-11-AS | V300-11-AS-K | T10U | FR010A | T10H |
| SE GS11-B-8 PKG | GS11-B-8 | 1.78 | 63 | 11 | 15 | V300-11-AS | V300-11-AS-K | T15U | FR020A | T15H |
| SE GS15-B-8 PKG | GS15-B-8 | 2.45 | 87 | 15 | 20 | V300-11-AS | V300-11-AS-K | T20U | FR020A | T20H |

Working pressure: 8 bar (116 psi). Other pressures are available as options.

These packages are recommended for premium industrial compressed air systems up to 1.75 m³/min. Each comprises an Airmac reciprocating compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for pneumatic tools and machinery and also for spray painting.



Airmac T55
Professional Package shown



| Package Product Code | Airmac 415 Volt Compressor | | | | | Fusheng 3 Micron Particulate Filter | Refrigerant Dryer | Fusheng 1 Micron Coalescing Filter |
|-------------------------------|----------------------------|-------------------|------|-------------|-----|--|----------------------|---|
| | Model | Free Air Delivery | | Motor Power | | | | |
| | | L/min | cfm | kW | hp | | | |
| AM T20 415V PKG * | T20 415V | 310 | 11.0 | 2.2 | 3 | T5P | Fusheng FR005A | T5U |
| AM HT20 415V PKG ^Δ | HT20 415V | 260 | 9.2 | 2.2 | 3 | T5P | SMC IDFA4E-23-LR | T5U |
| AM B23 415V PKG ^Δ | B23 415V | 325 | 11.5 | 3 | 4 | T5P | SMC IDFA4E-23-LR | T5U |
| AM V25 415V PKG * | V25 415V | 465 | 16.4 | 3 | 4 | T5P | Fusheng FR005A | T5U |
| AM B29 415V PKG ^Δ | B29 415V | 555 | 19.6 | 4 | 5.5 | T5P | SMC IDFA4E-23-LR | T5U |
| AM T30 415V PKG * | T30 415V | 620 | 21.9 | 4 | 5.5 | T5P | Fusheng FR005A | T5U |
| AM V40 415V PKG * | V40 415V | 825 | 29.2 | 5.5 | 7.5 | T10P | Fusheng FR010A | T10U |
| AM B52 415V PKG ^Δ | B52 415V | 1,050 | 37.1 | 7.5 | 10 | T10P | SMC IDFA8E-23-LR | T10U |
| AM T55 415V PKG * | T55 415V | 1,245 | 44.0 | 7.5 | 10 | T10P | Fusheng FR010A | T10U |
| AM T75 415V PKG * | T75 415V | 1,750 | 61.8 | 11 | 15 | T15P | Fusheng FR020A | T15U |

* Maximum pressure: 10 bar (145 psi)

^Δ Maximum pressure: 12 bar (175 psi)

415 Volt Silent Packages

The basic packages are ideal for noise sensitive workplace applications up to 1.1 m³/min where there is no need for treatment of the compressed air, such as air cleaning and dusting, pneumatic transfer pumping and liquid waste aeration. Each package comprises a Puma 415 Volt Silent reciprocating air compressor and vertical air receiver. The professional packages also include a refrigerant dryer and two stages of filtration to produce clean, dry compressed air suitable for pneumatic tools / machinery and spray painting.



| Basic Package Product Code | Puma 415 V Silent Compressor | | | Vertical Air Receiver | Receiver Accessory Kit | Fusheng 3 Micron Particulate Filter | Fusheng Refrigerant Dryer | Fusheng 1 Micron Coalescing Filter | Professional Package Product Code |
|-------------------------------|------------------------------|--------------------|------------------------|-----------------------|------------------------|-------------------------------------|---------------------------|------------------------------------|-----------------------------------|
| | Model | FAD L/min [cfm] | Motor Power kW [hp] | | | | | | |
| PU P30S 415V BPG | P30S | 520 [18.4] | 4 [5.5] | V300-11-AS | V300-11-AS-K | T5P | FR005A | T5U | PU P30S 415V PKG |
| PU P40S 415V BPG | P40S | 760 [26.9] | 5.5 [7.5] | V300-11-AS | V300-11-AS-K | T10P | FR010A | T10U | PU P40S 415V PKG |
| PU P55S 415V BPG | P55S | 1,055 [37.3] | 7.5 [10] | V300-11-AS | V300-11-AS-K | T10P | FR010A | T10U | PU P55S 415V PKG |

Maximum pressure: 9.3 bar (135 psi)

415 Volt Professional Packages

A popular choice for industrial applications with compressed air demand of up to 1.52 m³/min. Each package features a Puma reciprocating compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for powering pneumatic tools and machinery and also for spray painting.



Puma P55
Professional Package shown

| Package Product Code | Model | Puma 415 Volt Compressor | | Free Air Delivery | | Motor Power | | Fusheng 3 Micron Particulate Filter | Fusheng Refrigerant Dryer | Fusheng 1 Micron Coalescing Filter |
|----------------------|----------|--------------------------|------|-------------------|-----|-------------|--|-------------------------------------|---------------------------|------------------------------------|
| | | L/min | cfm | kW | hp | | | | | |
| PU P25 415V PKG | P25 415V | 390 | 13.8 | 3 | 4 | | | T5P | FR005A | T5U |
| PU P30 415V PKG | P30 415V | 520 | 18.4 | 4 | 5.5 | | | T5P | FR005A | T5U |
| PU P40 415V PKG | P40 415V | 760 | 26.9 | 5.5 | 7.5 | | | T10P | FR010A | T10U |
| PU P55 415V PKG | P55 415V | 1,055 | 37.3 | 7.5 | 10 | | | T10P | FR010A | T10U |
| PU P75 415V PKG | P75 415V | 1,520 | 53.7 | 11 | 15 | | | T15P | FR020A | T15U |

Maximum pressure: 9 bar (130 psi)

Ideal for applications where the highest standard of compressed air quality is critical such as dental and medical, food and beverage, and chemical and pharmaceutical facilities. Each package comprises an ultra-quiet running FS-Curtis oil-free scroll compressor, vertical air receiver, refrigerant dryer and four stages of filtration.

FS-Curtis ES08 Oil-Free Ultimate Package shown



| Package Product Code | FS-Curtis Oil-Free Scroll Compressor | | | Vertical Air Receiver & Kit | Fusheng 3 Micron Particulate Filter | Fusheng Refrigerant Dryer | Fusheng 1 Micron Coalescing Filter | Fusheng 0.01 Micron Coalescing Filter | Fusheng Activated Carbon Filter |
|----------------------|--------------------------------------|----------------------------------|------------------------|-----------------------------|-------------------------------------|---------------------------|------------------------------------|---------------------------------------|---------------------------------|
| | Model | Free Air Delivery L/min (cfm) | Motor Power kW (hp) | | | | | | |
| FS ES04-8B PKG | ES04-8B | 430 (15) | 3.7 (5) | V150-11-AS | T5P | FR005A | T5U | T5H | T5C |
| FS ES08-8B PKG | ES08-8B | 850 (30) | 7.5 (10) | V300-11-AS | T10P | FR010A | T10U | T10H | T10C |
| FS ES11-8B PKG | ES11-8B | 1,280 (45) | 11 (15) | V500-11-AS | T15P | FR020A | T15U | T15H | T15C |
| FS ES15-8B PKG | ES15-8B | 1,700 (60) | 15 (20) | V500-11-AS | T20P | FR020A | T20U | T20H | T20C |

Maximum pressure: 8 bar (116 psi)



senatorair.com.au



airmac.com.au



puma-air.com.au



fusheng.com.au



fscurtis.com.au

Express Tank™

AUTHORISED DEALER:



Specifications are subject to change without notice. 2024-07-01