


In-Tank Check Valves


"Super-Chek®" Check Valves

The Super-Chek® design has been proven over the last 15 years to be the standard for air compressor in-tank check valves. One-piece brass bodies, stainless steel springs, and glass-filled fluoropolymer poppets all add up to long term reliability, while the eight discharge holes insure quiet operation. Valves may be disassembled for cleaning or repair. Valves are 100% tested for backflow leakage performance. 450 psi max pressure, 400 deg F. max temperature.

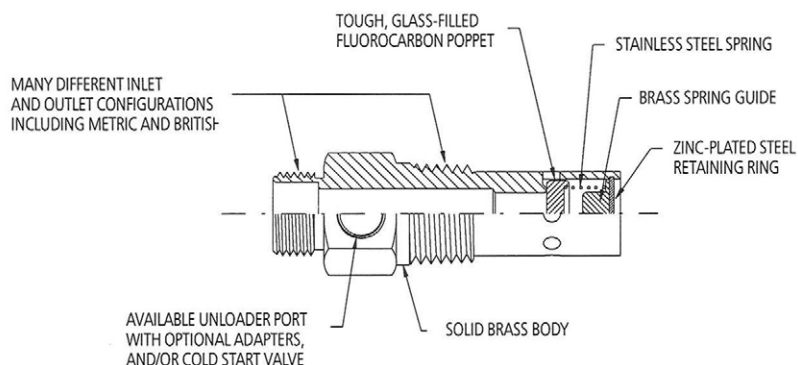


"Super-Chek®" Valve Details

Available Configurations

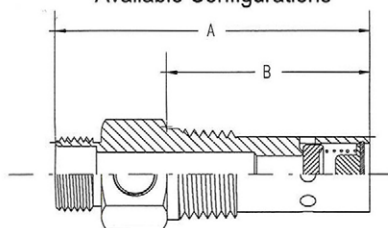

COMPRESSION FITTING INLET

CONFIG. NUMBER	TUBE COMP. INLET	M.P.T. OUTLET	HEX	DIMENSIONS A	B	RECOMMENDED MAX FLOW RATE	APPROX. SHIPPING WT.
C3850	3/8" x	1/2"	7/8"	2-7/8"	1-7/8"	20 SCFM	4.2 oz.
C5050	1/2" x	1/2"	7/8"	2-7/8"	1-7/8"	20 SCFM	4.3 oz.
C7575	3/4" x	3/4"	1-1/8"	3-1/2"	2-3/8"	30 SCFM	7.4 oz.
C7510	3/4" x	1"	1-5/16"	3-3/4"	2-5/8"	60 SCFM	11.5 oz.

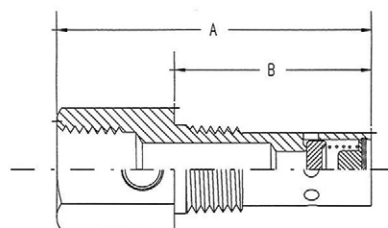

FEMALE PIPE THREAD INLET

CONFIG. NUMBER	F.P.T. INLET	M.P.T. OUTLET	HEX	DIMENSIONS A	B	RECOMMENDED MAX FLOW RATE	APPROX. SHIPPING WT.
P3838	3/8" x	3/8"	13/16"	2"	1-1/8"	12 SCFM	3.0 oz.
P3850	3/8" x	1/2"	7/8"	2-3/4"	1-7/8"	20 SCFM	3.8 oz.
P5050	1/2" x	1/2"	1"	3"	1-7/8"	20 SCFM	5.5 oz.
P5075	1/2" x	3/4"	1-1/8"	3-1/2"	2-1/2"	30 SCFM	6.5 oz.
P7575	3/4" x	3/4"	1-3/16"	3-1/4"	2-1/4"	30 SCFM	7.2 oz.
P7510	3/4" x	1"	1-5/16"	3-1/2"	2-1/2"	60 SCFM	11.4 oz.
P7515	3/4" x	1-1/2"	2-1/4"	4-1/2"	3-1/2"	150 SCFM	24 oz.
P1010	1" x	1"	1-1/2"	3-7/8"	2-5/8"	60 SCFM	12.5 oz.
P1212	1-1/4" x	1-1/4"	1-7/8"	4-7/16"	3-1/4"	130 SCFM	17.5 oz.
P1515	1-1/2" x	1-1/2"	2-1/4"	4-1/2"	3-1/2"	150 SCFM	30 oz.

ORDER GUIDE

Example:

