

GLENCO

Air & Power

glencoairpower.com.au



AIRMAC

ALMIG
Compressor Systems

FS CURTIS

FUSHENG

PUMA
AIR COMPRESSOR

SENATOR
INDUSTRIAL AIR COMPRESSORS



Compressed Air Products

Revision: 2024-01-01

Effective: 2024-02-01

Prices and specifications subject to change without notice.

CONTENTS

- **Reciprocating Air Compressors**
 - Airmac
 - Puma
 - Price List
- **Electric Rotary Air Compressors**
 - FS-Curtis
 - Senator
 - Price List
- **Compressed Air System Packages**
 - Airmac
 - Puma
 - Senator
 - FS-Curtis
 - Price List
- **Diesel Screw Air Compressors**
 - FS-Curtis Box Type
 - FS-Curtis Trailer Type
 - Price List
- **Compressed Air Storage & Treatment**
 - Vertical Air Receivers
 - Refrigerant Compressed Air Dryers
 - Compressed Air Filters
 - Filter-Regulators & Auto-Drains
 - Price List
- **Spare Parts**
- **Notes**

Reciprocating Air Compressors





Premium Quality

Reciprocating Air Compressors



Domestic, trade and small industrial users can choose from ten models in the 240 Volt range. With two or four-wheel mounted, stationary and twin-pump variants, there's an Airmac compressor to suit every application.


V13 240V

V13-H 240V

T17 240V

Motor Power	1.65 kW (2.2 hp)	1.65 kW (2.2 hp)	2.2 kW (3 hp)
Pump Displacement	285 L/min (10.1 cfm)	285 L/min (10.1 cfm)	390 L/min (13.8 cfm)
Free Air Delivery	185 L/min (6.5 cfm)	185 L/min (6.5 cfm)	280 L/min (9.9 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	60 Litres	70 Litres
Pump Model	Fusheng VA-65	Fusheng VA-65	Fusheng TA-65
Pump Speed	975 rpm	975 rpm	815 rpm
Electricity Supply	10 Amps	10 Amps	15 Amps
Product Code	AM V13 240V	AM V13-H 240V	AM T17 240V


T17-H 240V

T20-H 240V

HT20 240V 175psi

Motor Power	2.2 kW (3 hp)	2.4 kW (3.2 hp)	2.4 kW (3.2 hp)
Pump Displacement	390 L/min (13.8 cfm)	475 L/min (16.8 cfm)	320 L/min (11.3 cfm)
Free Air Delivery	280 L/min (9.9 cfm)	310 L/min (11 cfm)	260 L/min (9.2 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
Tank Volume	70 Litres	70 Litres	70 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65	Fusheng HTA-65
Pump Speed	815 rpm	990 rpm	995 rpm
Electricity Supply	15 Amps	15 Amps	15 Amps
Product Code	AM T17-H 240V	AM T20-H 240V	AM HT20 240V

**T20LG 240V****T20 240V****T20-120L 240V**

Motor Power	2.4 kW (3.2 hp)	2.4 kW (3.2 hp)	2.4 kW (3.2 hp)
Pump Displacement	390 L/min (13.8 cfm)	475 L/min (16.8 cfm)	475 L/min (16.8 cfm)
Free Air Delivery	280 L/min (9.9 cfm)	310 L/min (11 cfm)	310 L/min (11 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	100 Litres	100 Litres	120 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65	Fusheng TA-65
Pump Speed	815 rpm	990 rpm	990 rpm
Electricity Supply	15 Amps	15 Amps	15 Amps
Product Code	AM T20LG 240V	AM T20 240V	AM T20-120L 240V

**TT40 240V**

Motor Power	2 x 2.4 kW (2 x 3.2 hp)
Pump Displacement	780 L/min (27.6 cfm)
Free Air Delivery	560 L/min (19.8 cfm)
Maximum Pressure	1,000 kPa (145 psi)
Tank Volume	190 Litres
Pump Model	Fusheng TA-65
Pump Speed	815 rpm
Electricity Supply	2 x 15 Amps
Product Code	AM TT40 240V

Airmac's 415 Volt series is the best choice for industrial users who need a safe and reliable heavy-duty compressor for their factory or workshop. Every model offers a superb combination of unique features and high performance.


T20 415V

HT20 415V

B23 415V

Motor Power	2.2 kW (3 hp)	2.2 kW (3 hp)	3 kW (4 hp)
Pump Displacement	475 L/min (16.8 cfm)	320 L/min (11.3 cfm)	390 L/min (13.8 cfm)
Free Air Delivery	310 L/min (11.0 cfm)	260 L/min (9.2 cfm)	325 L/min (11.5 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,200 kPa (175 psi)
Tank Volume	100 Litres	100 Litres	125 Litres
Pump Model	Fusheng TA-65	Fusheng HTA-65	Fusheng B-1
Pump Speed	990 rpm	995 rpm	960 rpm
Current Draw	4.8 Amps	4.8 Amps	6.4 Amps
Product Code	AM T20 415V	AM HT20 415V	AM B23 415V


V25 415V

B29 415V

T30 415V

Motor Power	3 kW (4 hp)	4 kW (5.5 hp)	4 kW (5.5 hp)
Pump Displacement	600 L/min (21.2 cfm)	645 L/min (22.8 cfm)	800 L/min (28.3 cfm)
Free Air Delivery	465 L/min (16.4 cfm)	555 L/min (19.6 cfm)	620 L/min (21.9 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
Tank Volume	125 Litres	150 Litres	150 Litres
Pump Model	Fusheng VA-80	Fusheng B-2	Fusheng TA-80
Pump Speed	995 rpm	950 rpm	885 rpm
Current Draw	6.4 Amps	8.3 Amps	8.3 Amps
Product Code	AM V25 415V	AM B29 415V	AM T30 415V


V40 415V

B52 415V

T55 415V

Motor Power	5.5 kW (7.5 hp)	7.5 kW (10 hp)	7.5 kW (10 hp)
Pump Displacement	1,060 L/min (37.5 cfm)	1,165 L/min (41.2 cfm)	1,510 L/min (53.4 cfm)
Free Air Delivery	825 L/min (29.2 cfm)	1,050 L/min (37.1 cfm)	1,245 L/min (44.0 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
Tank Volume	250 Litres	300 Litres	300 Litres
Pump Model	Fusheng VA-100	Fusheng B-3	Fusheng TA-100
Pump Speed	965 rpm	860 rpm	915 rpm
Current Draw	12.2 Amps	16.1 Amps	16.1 Amps
Product Code	AM V40 415V	AM B52 415V	AM T55 415V


T75 415V

Motor Power	11 kW (15 hp)
Pump Displacement	2,105 L/min (74.4 cfm)
Free Air Delivery	1,750 L/min (61.8 cfm)
Maximum Pressure	1,000 kPa (145 psi)
Tank Volume	400 Litres
Pump Model	Fusheng TA-120
Pump Speed	775 rpm
Current Draw	23.0 Amps
Product Code	AM T75 415V

No electricity? No problem. Airmac's market-leading range of Honda petrol engine-powered compressors is ideal for use out in the field. The genuine Honda GX Series engines perfectly complement these superior portable units.

POWERED by
HONDA



V16P



V16P-H



T20P

Honda Engine	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
Starter	Rope Pull	Rope Pull	Rope Pull
Pump Displacement	300 L/min (10.6 cfm)	300 L/min (10.6 cfm)	490 L/min (17.3 cfm)
Free Air Delivery	195 L/min (6.9 cfm)	195 L/min (6.9 cfm)	320 L/min (11.3 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	60 Litres	70 Litres
Pump Model	Fusheng VA-65	Fusheng VA-65	Fusheng TA-65
Pump Speed	1,025 rpm	1,025 rpm	1,025 rpm
Product Code	AM V16P	AM V16P-H	AM T20P

POWERED by
HONDA



T20P ES



T20P-H



T20P-H ES

Honda Engine	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
Starter	Key Electric & Rope Pull	Rope Pull	Key Electric & Rope Pull
Pump Displacement	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
Free Air Delivery	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	70 Litres	70 Litres	70 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65	Fusheng TA-65
Pump Speed	1,025 rpm	1,025 rpm	1,025 rpm
Product Code	AM T20P ES	AM T20P-H	AM T20P-H ES

POWERED by
HONDA



T20P-100L



T20P-100L ES



HT20P-H 175psi

Honda Engine	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
Starter	Rope Pull	Key Electric & Rope Pull	Rope Pull
Pump Displacement	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)	330 L/min (11.7 cfm)
Free Air Delivery	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)	265 L/min (9.4 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
Tank Volume	100 Litres	100 Litres	70 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65	Fusheng HTA-65
Pump Speed	1,025 rpm	1,025 rpm	1,030 rpm
Product Code	AM T20P-100L	AM T20P-100L ES	AM HT20P-H

POWERED by
HONDA



HT20P-H ES 175psi



T20P-120L



T20P-120L ES

Honda Engine	6.5 hp GX200	6.5 hp GX200	6.5 hp GX200
Starter	Key Electric & Rope Pull	Rope Pull	Key Electric & Rope Pull
Pump Displacement	330 L/min (11.7 cfm)	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
Free Air Delivery	265 L/min (9.4 cfm)	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
Maximum Pressure	1,200 kPa (175 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	70 Litres	120 Litres	120 Litres
Pump Model	Fusheng HTA-65	Fusheng TA-65	Fusheng TA-65
Pump Speed	1,030 rpm	1,025 rpm	1,025 rpm
Product Code	AM HT20P-H ES	AM T20P-120L	AM T20P-120L ES

POWERED by
HONDA


V25P

V25P ES

B24P 175psi

Honda Engine	9 hp GX270	9 hp GX270	9 hp GX270
Starter	Rope Pull	Key Electric & Rope Pull	Rope Pull
Pump Displacement	635 L/min (22.4 cfm)	635 L/min (22.4 cfm)	565 L/min (20.0 cfm)
Free Air Delivery	485 L/min (17.1 cfm)	485 L/min (17.1 cfm)	470 L/min (16.6 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
Tank Volume	125 Litres	125 Litres	100 Litres
Pump Model	Fusheng VA-80	Fusheng VA-80	Fusheng B-1
Pump Speed	1,055 rpm	1,055 rpm	1,385 rpm
Product Code	AM V25P	AM V25P ES	AM B24P

POWERED by
HONDA


B24P ES 175psi

T30P

T30P ES

Honda Engine	9 hp GX270	9 hp GX270	9 hp GX270
Starter	Key Electric & Rope Pull	Rope Pull	Key Electric & Rope Pull
Pump Displacement	565 L/min (20.0 cfm)	880 L/min (31.1 cfm)	880 L/min (31.1 cfm)
Free Air Delivery	470 L/min (16.6 cfm)	680 L/min (24.0 cfm)	680 L/min (24.0 cfm)
Maximum Pressure	1,200 kPa (175 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	100 Litres	125 Litres	125 Litres
Pump Model	Fusheng B-1	Fusheng TA-80	Fusheng TA-80
Pump Speed	1,385 rpm	970 rpm	970 rpm
Product Code	AM B24P ES	AM T30P	AM T30P ES

POWERED by
HONDA



B35P ES 175psi



V40P ES



T55P ES

Honda Engine	13 hp GX390	13 hp GX390	13 hp GX390
Starter	Key Electric & Rope Pull	Key Electric & Rope Pull	Key Electric & Rope Pull
Pump Displacement	945 L/min (33.4 cfm)	1,105 L/min (39.0 cfm)	1,485 L/min (52.5 cfm)
Free Air Delivery	815 L/min (28.8 cfm)	850 L/min (30.0 cfm)	1,225 L/min (43.3 cfm)
Maximum Pressure	1,200 kPa (175 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	120 Litres	150 Litres	150 Litres
Pump Model	Fusheng B-2	Fusheng VA-100	Fusheng TA-100
Pump Speed	1,400 rpm	1,005 rpm	900 rpm
Product Code	AM B35P ES	AM V40P ES	AM T55P ES

The Yanmar diesel engine-powered range of Airmac compressors is the preferred choice at mine sites, oil and gas facilities, and other hazardous workplaces where safety, reliability and fuel economy are paramount.


T20D
T20D ES
HT20D 175psi

Yanmar Engine	4.7 hp L48	4.7 hp L48	4.7 hp L48
Starter	Rope Pull	Key Electric & Rope Pull	Rope Pull
Emergency Stop	Not Available	Push Button	Not Available
Pump Displacement	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)	330 L/min (11.7 cfm)
Free Air Delivery	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)	265 L/min (9.4 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,200 kPa (175 psi)
Tank Volume	70 Litres	70 Litres	70 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65	Fusheng HTA-65
Product Code	AM T20D	AM T20D ES	AM HT20D


HT20D ES 175psi
B24D ES 175psi
T30D ES

Yanmar Engine	4.7 hp L48	6.7 hp L70	6.7 hp L70
Starter	Key Electric & Rope Pull	Key Electric & Rope Pull	Key Electric & Rope Pull
Emergency Stop	Push Button	Push Button	Push Button
Pump Displacement	330 L/min (11.7 cfm)	565 L/min (20.0 cfm)	880 L/min (31.1 cfm)
Free Air Delivery	265 L/min (9.4 cfm)	470 L/min (16.6 cfm)	680 L/min (24.0 cfm)
Maximum Pressure	1,200 kPa (175 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
Tank Volume	70 Litres	100 Litres	125 Litres
Pump Model	Fusheng HTA-65	Fusheng B-1	Fusheng TA-80
Product Code	AM HT20D ES	AM B24D ES	AM T30D ES


B35D ES 175psi
V40D ES

Yanmar Engine	10 hp L100	10 hp L100
Starter	Key Electric & Rope Pull	Key Electric & Rope Pull
Emergency Stop	Push Button	Push Button
Pump Displacement	945 L/min (33.4 cfm)	1,105 L/min (39.0 cfm)
Free Air Delivery	815 L/min (28.8 cfm)	850 L/min (30.0 cfm)
Maximum Pressure	1,200 kPa (175 psi)	1,000 kPa (145 psi)
Tank Volume	120 Litres	150 Litres
Pump Model	Fusheng B-2	Fusheng VA-100
Product Code	AM B35D ES	AM V40D ES

Some applications are not amenable to using conventional tank-mounted compressors. In response, Airmac has developed the truly innovative Multi-Function Series that features different form factors and user-configurable layouts.



V13 MFC 240V

Motor Power	1.65 kW (2.2 hp)
Pump Displacement	285 L/min (10.1 cfm)
Free Air Delivery	185 L/min (6.5 cfm)
Maximum Pressure	1,000 kPa (145 psi)
Tank Volume	40 Litres
Pump Model	Fusheng VA-65
Pump Speed	975 rpm
Electricity Supply	10 Amps
Product Code	AM V13 MFC 240V



T20P MFC

T20P MFC ES

Honda Engine	6.5 hp GX200	6.5 hp GX200
Starter	Rope Pull	Key Electric & Rope Pull
Pump Displacement	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
Free Air Delivery	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	60 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65
Pump Speed	1,025 rpm	1,025 rpm
Product Code	AM T20P MFC	AM T20P MFC ES


T20D MFC
T20D MFC ES

Yanmar Engine	4.7 hp L48	4.7 hp L48
Starter	Rope Pull	Key Electric & Rope Pull
Emergency Stop	Not Available	Push Button
Pump Displacement	490 L/min (17.3 cfm)	490 L/min (17.3 cfm)
Free Air Delivery	320 L/min (11.3 cfm)	320 L/min (11.3 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	60 Litres
Pump Model	Fusheng TA-65	Fusheng TA-65
Product Code	AM T20D MFC	AM T20D MFC ES

Choose from a range of genuine, high quality accessories to enhance the function, performance or protection of your Airmac air compressor. These practical and specialized accessories have been extensively developed in accordance with Airmac's rigorous standards to ensure perfect fit and operation.

**12V Battery Kit SM****12V Battery Kit LG**

Battery Capacity CCA	145 Amps	320 Amps
Battery Type	Sealed, Maintenance Free	Sealed, Maintenance Free
Suit Honda Engine	GX160 & GX200	GX270 & GX390
Suit Yanmar Engine	L48	L70 & L100
Product Code	AM 12V BKSM	AM 12V BKLG


12V Connection Kit SM

12V Connection Kit LG

Suit Battery	Yuasa YTZ14S or equivalent	Supercharge MFU1R or equiv.
Battery Included	No	No
Suit Honda Engine	GX160 & GX200	GX270 & GX390
Suit Yanmar Engine	L48	L70 & L100
Product Code	AM 12V BKSM-NB	AM 12V BKLG-NB


Cover

Cover Material	UV Stabilized PVC
Fastening	2 Adjustable Buckle Straps
Applications	Mobile and Stationary
Suit Tank Volume	60, 70, 100 & 120 Litres
Product Code	AM CC903644


Vibration Isolator Kit

Isolator Material	Rubber
Capacity	800 kg Total
Applications	Mobile and Stationary
Suit Airmac Model	All Pallet Foot-Mounted
Product Code	AM RVI KIT



Dependable Performance

Reciprocating Air Compressors



POWERED by
HONDA

YANMAR

Puma 240 Volt air compressors have remained ever popular in Australia for over 30 years due to their proven reliability and performance. Featuring Puma's tried and tested cast iron compressor pumps for high flow and pressure outputs, these portable units are ideal for serious DIY, farm and trade use.



P13 240V



P15 240V



P17 240V

Motor Power	1.65 kW (2.2 hp)	1.65 kW (2.2 hp)	2.2 kW (3 hp)
Pump Displacement	255 L/min (9.0 cfm)	270 L/min (9.5 cfm)	400 L/min (14.1 cfm)
Free Air Delivery	170 L/min (6.0 cfm)	200 L/min (7.1 cfm)	280 L/min (9.9 cfm)
Maximum Pressure	1,000 kPa (145 psi)	900 kPa (130 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	60 Litres	60 Litres
Pump Model	Puma PG15	Puma PG20	Puma PG29
Pump Speed	1,360 rpm	885 rpm	1,360 rpm
Electricity Supply	10 Amps	10 Amps	15 Amps
Product Code	PU P13 240V	PU P15 240V	PU P17 240V



P20 240V

Motor Power	2.4 kW (3.2 hp)
Pump Displacement	420 L/min (14.8 cfm)
Free Air Delivery	320 L/min (11.3 cfm)
Maximum Pressure	900 kPa (130 psi)
Tank Volume	75 Litres
Pump Model	Puma PG30
Pump Speed	880 rpm
Electricity Supply	15 Amps
Product Code	PU P20 240V

An all new and improved range of Puma 415 Volt air compressors is now available in Australia with a choice of popular models from 3 to 11 kW. Factory, workshop and industrial applications will be reliably served by these high output, quiet running stationary units fitted with Puma's durable full cast iron compressor pumps.



P25 415V



P30 415V



P40 415V

Motor Power	3 kW (4 hp)	4 kW (5.5 hp)	5.5 kW (7.5 hp)
Pump Displacement	545 L/min (19.3 cfm)	735 L/min (26.0 cfm)	1,020 L/min (36.0 cfm)
Free Air Delivery	390 L/min (13.8 cfm)	520 L/min (18.4 cfm)	760 L/min (26.9 cfm)
Maximum Pressure	900 kPa (130 psi)	900 kPa (130 psi)	900 kPa (130 psi)
Tank Volume	125 Litres	140 Litres	215 Litres
Pump Model	Puma PG40	Puma PG55	Puma PG75
Pump Speed	900 rpm	810 rpm	810 rpm
Current Draw	6.4 Amps	8.3 Amps	12.2 Amps
Product Code	PU P25 415V	PU P30 415V	PU P40 415V



P55 415V



P75 415V

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)
Pump Displacement	1,415 L/min (50.0 cfm)	1,965 L/min (69.4 cfm)
Free Air Delivery	1,055 L/min (37.3 cfm)	1,520 L/min (53.7 cfm)
Maximum Pressure	900 kPa (130 psi)	900 kPa (130 psi)
Tank Volume	265 Litres	330 Litres
Pump Model	Puma PG100	Puma PG151
Pump Speed	750 rpm	815 rpm
Current Draw	16.1 Amps	23.0 Amps
Product Code	PU P55 415V	PU P75 415V

Puma's new Honda petrol engine-powered air compressors offer a great solution for on-site or farm use where there's no electric power available. There's a wide choice of models from 6.5 to 13 hp featuring Puma's innovative and durable long-stroke, cast iron compressor pumps for class leading free-air-delivery performance.

POWERED by
HONDA



P18H



P22H



P22H ES

Honda Engine	GX200, 6.5 hp	GX200, 6.5 hp	GX200, 6.5 hp
Starter	Rope Pull	Rope Pull	Key Electric & Rope Pull
Pump Displacement	430 L/min (15.2 cfm)	540 L/min (19.1 cfm)	540 L/min (19.1 cfm)
Free Air Delivery	350 L/min (12.4 cfm)	440 L/min (15.6 cfm)	440 L/min (15.6 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	75 Litres	75 Litres
Pump Model	Puma PG31	Puma PG41	Puma PG41
Pump Speed	1,080 rpm	900 rpm	900 rpm
Product Code	PU P18H	PU P22H	PU P22H ES

POWERED by
HONDA



P30H



P30H ES



P55H ES

Honda Engine	GX270, 9 hp	GX270, 9 hp	GX390, 13 hp
Starter	Rope Pull	Key Electric & Rope Pull	Key Electric & Rope Pull
Pump Displacement	805 L/min (28.4 cfm)	805 L/min (28.4 cfm)	1,340 L/min (47.3 cfm)
Free Air Delivery	690 L/min (24.4 cfm)	690 L/min (24.4 cfm)	1,015 L/min (35.9 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	125 Litres	125 Litres	140 Litres
Pump Model	Puma PG56	Puma PG56	Puma PG101
Pump Speed	940 rpm	940 rpm	740 rpm
Product Code	PU P30H	PU P30H ES	PU P55H ES

Puma air compressors are now available in Australia powered by Yanmar diesel engines for use in critical safety environments. Mine Spec versions are available with emergency stop fuel shutoff. Outstanding free-air-delivery and durability are both assured by Puma's innovative long-stroke, cast iron compressor pumps.

YANMAR



	P18Y	P18Y ES	P22Y
Yanmar Engine	L48, 4.7 hp	L48, 4.7 hp	L48, 4.7 hp
Starter	Rope Pull	Key Electric & Rope Pull	Rope Pull
Emergency Stop	Not Available	Push Button	Not Available
Pump Displacement	430 L/min (15.2 cfm)	430 L/min (15.2 cfm)	540 L/min (19.1 cfm)
Free Air Delivery	350 L/min (12.4 cfm)	350 L/min (12.4 cfm)	440 L/min (15.5 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	60 Litres	60 Litres	75 Litres
Pump Model	Puma PG31	Puma PG31	Puma PG41
Product Code	PU P18Y	PU P18Y ES	PU P22Y

YANMAR



	P22Y ES	P30Y ES	P40Y ES
Yanmar Engine	L48, 4.7 hp	L70, 6.7 hp	L100, 10 hp
Starter	Key Electric & Rope Pull	Key Electric & Rope Pull	Key Electric & Rope Pull
Emergency Stop	Push Button	Push Button	Push Button
Pump Displacement	540 L/min (19.1 cfm)	805 L/min (28.4 cfm)	1,085 L/min (38.3 cfm)
Free Air Delivery	440 L/min (15.5 cfm)	690 L/min (24.4 cfm)	805 L/min (28.4 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Tank Volume	75 Litres	125 Litres	140 Litres
Pump Model	Puma PG41	Puma PG56	Puma PG76
Product Code	PU P22Y ES	PU P30Y ES	PU P40Y ES

Puma 415 Volt Silent air compressors use innovative design to combine the cost benefits of a piston compressor with the quiet operating characteristics of a screw compressor. These compact and stylish units offer an economical low-noise solution for workplace applications with variable compressed air demand.



	P30S 415V	P40S 415V	P55S 415V
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Pump Displacement	735 L/min (26.0 cfm)	1,020 L/min (36.0 cfm)	1,415 L/min (50.0 cfm)
Free Air Delivery	520 L/min (18.4 cfm)	760 L/min (26.9 cfm)	1,055 L/min (37.3 cfm)
Maximum Pressure	930 kPa (135 psi)	930 kPa (135 psi)	930 kPa (135 psi)
Pump Speed	810 rpm	810 rpm	750 rpm
Current Draw	9.0 Amps	12.7 Amps	16.3 Amps
Noise Level @ 1 m	66 dB(A)	65 dB(A)	67 dB(A)
Optional Extra	150 or 330 L Vert. Tank	150 or 330 L Vert. Tank	330 or 530 L Vert. Tank
Product Code	PU P30S 415V	PU P40S 415V	PU P55S 415V

Choose from a range of genuine, high quality accessories to enhance the function, performance or appearance of your Puma air compressor. These practical and specialized accessories have been extensively developed in accordance with Puma's design standards to ensure reliable fit and operation.



	12V Battery Kit SM	12V Battery Kit LG
Battery Capacity CCA	145 Amps	320 Amps
Battery Type	Sealed, Maintenance Free	Sealed, Maintenance Free
Suit Honda Engine	GX160 & GX200	GX270 & GX390
Suit Yanmar Engine	L48	L70 & L100
Product Code	PU 12V BKSM	PU 12V BKLG



12V Connection Kit SM

12V Connection Kit LG

Suit Battery	Yuasa YTZ14S or equivalent	Supercharge MFU1R or equiv.
Battery Included	No	No
Suit Honda Engine	GX160 & GX200	GX270 & GX390
Suit Yanmar Engine	L48	L70 & L100
Product Code	PU 12V BKSM-NB	PU 12V BKLG-NB



Vibration Isolator Kit

Isolator Material	Rubber
Capacity	800 kg Total
Applications	Mobile and Stationary
Suit Puma Model	All Pallet Foot-Mounted
Product Code	PU RVI KIT



Reciprocating Air Compressors

Product Code	Description	List Price Excl. GST	List Price Incl. GST
240 Volt Air Compressors			
AM V13 240V	Airmac V13 240V	\$1,617.27	\$1,779.00
AM V13-H 240V	Airmac V13-H 240V	\$1,617.27	\$1,779.00
AM T17 240V	Airmac T17 240V	\$1,908.18	\$2,099.00
AM T17-H 240V	Airmac T17-H 240V	\$1,908.18	\$2,099.00
AM T20-H 240V	Airmac T20-H 240V	\$2,180.91	\$2,399.00
AM HT20 240V	Airmac HT20 240V 175psi	\$2,262.73	\$2,489.00
AM T20LG 240V	Airmac T20LG 240V	\$2,362.73	\$2,599.00
AM T20 240V	Airmac T20 240V	\$2,362.73	\$2,599.00
AM T20-120L 240V	Airmac T20-120L 240V	\$2,571.82	\$2,829.00
AM TT40 240V	Airmac TT40 240V	\$5,044.55	\$5,549.00
415 Volt Air Compressors			
AM T20 415V	Airmac T20 415V	\$2,635.45	\$2,899.00
AM HT20 415V	Airmac HT20 415V	\$2,699.09	\$2,969.00
AM B23 415V	Airmac B23 415V	\$3,435.45	\$3,779.00
AM V25 415V	Airmac V25 415V	\$3,399.09	\$3,739.00
AM B29 415V	Airmac B29 415V	\$4,271.82	\$4,699.00
AM T30 415V	Airmac T30 415V	\$4,480.91	\$4,929.00
AM V40 415V	Airmac V40 415V	\$5,708.18	\$6,279.00
AM B52 415V	Airmac B52 415V	\$7,635.45	\$8,399.00
AM T55 415V	Airmac T55 415V	\$7,635.45	\$8,399.00
AM T75 415V	Airmac T75 415V	\$10,908.18	\$11,999.00
Honda Petrol Air Compressors			
AM V16P	Airmac V16P	\$2,480.91	\$2,729.00
AM V16P-H	Airmac V16P-H	\$2,480.91	\$2,729.00
AM T20P	Airmac T20P	\$2,862.73	\$3,149.00
AM T20P ES	Airmac T20P Electric Start	\$3,590.00	\$3,949.00
AM T20P-H	Airmac T20P-H	\$2,862.73	\$3,149.00
AM T20P-H ES	Airmac T20P-H Electric Start	\$3,590.00	\$3,949.00
AM T20P-100L	Airmac T20P-100L	\$3,053.64	\$3,359.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Honda Petrol Air Compressors			
AM T20P-100L ES	Airmac T20P-100L Electric Start	\$3,780.91	\$4,159.00
AM HT20P-H	Airmac HT20P-H 175psi	\$3,026.36	\$3,329.00
AM HT20P-H ES	Airmac HT20P-H Electric Start 175psi	\$3,753.64	\$4,129.00
AM T20P-120L	Airmac T20P-120L	\$3,235.45	\$3,559.00
AM T20P-120L ES	Airmac T20P-120L Electric Start	\$3,962.73	\$4,359.00
AM V25P	Airmac V25P	\$4,580.91	\$5,039.00
AM V25P ES	Airmac V25P Electric Start	\$5,344.55	\$5,879.00
AM B24P	Airmac B24P 175psi	\$4,580.91	\$5,039.00
AM B24P ES	Airmac B24P Electric Start 175psi	\$5,344.55	\$5,879.00
AM T30P	Airmac T30P	\$5,335.45	\$5,869.00
AM T30P ES	Airmac T30P Electric Start	\$6,099.09	\$6,709.00
AM B35P ES	Airmac B35P Electric Start 175psi	\$6,362.73	\$6,999.00
AM V40P ES	Airmac V40P Electric Start	\$7,617.27	\$8,379.00
AM T55P ES	Airmac T55P Electric Start	\$8,299.09	\$9,129.00
Yanmar Diesel Air Compressors			
AM T20D	Airmac T20D	\$5,626.36	\$6,189.00
AM T20D ES	Airmac T20D Electric Start	\$6,580.91	\$7,239.00
AM HT20D	Airmac HT20D 175psi	\$5,726.36	\$6,299.00
AM HT20D ES	Airmac HT20D Electric Start 175psi	\$6,680.91	\$7,349.00
AM B24D ES	Airmac B24D Electric Start 175psi	\$8,080.91	\$8,889.00
AM T30D ES	Airmac T30D Electric Start	\$8,590.00	\$9,449.00
AM B35D ES	Airmac B35D Electric Start 175psi	\$9,762.73	\$10,739.00
AM V40D ES	Airmac V40D Electric Start	\$10,817.27	\$11,899.00
Multi-Function Air Compressors			
AM V13 MFC 240V	Airmac V13 MFC 240V	\$2,262.73	\$2,489.00
AM T20P MFC	Airmac T20P MFC	\$3,580.91	\$3,939.00
AM T20P MFC ES	Airmac T20P MFC Electric Start	\$4,308.18	\$4,739.00
AM T20D MFC	Airmac T20D MFC	\$6,062.73	\$6,669.00
AM T20D MFC ES	Airmac T20D MFC Electric Start	\$7,017.27	\$7,719.00



Reciprocating Air Compressors

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Air Compressor Accessories			
AM 12V BKSM	Airmac 12 V Battery Kit - Small	\$415.45	\$457.00
AM 12V BKLG	Airmac 12 V Battery Kit - Large	\$430.00	\$473.00
AM 12V BKSM-NB	Airmac 12 V Connection Kit - Small	\$220.00	\$242.00
AM 12V BKLG-NB	Airmac 12 V Connection Kit - Large	\$229.09	\$252.00
AM CC903644	Airmac Compressor Cover	\$61.82	\$68.00
AM RVI KIT	Airmac Vibration Isolator Kit	\$103.64	\$114.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
240 Volt Air Compressors			
PU P13 240V	Puma P13 240V	\$1,144.55	\$1,259.00
PU P15 240V	Puma P15 240V	\$1,253.64	\$1,379.00
PU P17 240V	Puma P17 240V	\$1,362.73	\$1,499.00
PU P20 240V	Puma P20 240V	\$1,780.91	\$1,959.00
415 Volt Air Compressors			
PU P25 415V	Puma P25 415V	\$2,626.36	\$2,889.00
PU P30 415V	Puma P30 415V	\$3,353.64	\$3,689.00
PU P40 415V	Puma P40 415V	\$4,408.18	\$4,849.00
PU P55 415V	Puma P55 415V	\$5,144.55	\$5,659.00
PU P75 415V	Puma P75 415V	\$7,980.91	\$8,779.00
Honda Petrol Air Compressors			
PU P18H	Puma P18H	\$2,353.64	\$2,589.00
PU P22H	Puma P22H	\$2,808.18	\$3,089.00
PU P22H ES	Puma P22H Electric Start	\$3,526.36	\$3,879.00
PU P30H	Puma P30H	\$4,435.45	\$4,879.00
PU P30H ES	Puma P30H Electric Start	\$5,171.82	\$5,689.00
PU P55H ES	Puma P55H Electric Start	\$6,871.82	\$7,559.00
Yanmar Diesel Air Compressors			
PU P18Y	Puma P18Y	\$5,244.55	\$5,769.00
PU P18Y ES	Puma P18Y Electric Start	\$6,199.09	\$6,819.00
PU P22Y	Puma P22Y	\$5,708.18	\$6,279.00
PU P22Y ES	Puma P22Y Electric Start	\$6,662.73	\$7,329.00
PU P30Y ES	Puma P30Y Electric Start	\$8,144.55	\$8,959.00
PU P40Y ES	Puma P40Y Electric Start	\$9,780.91	\$10,759.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
415 Volt Silent Air Compressors			
PU P30S 415V	Puma P30S 415V	\$5,435.45	\$5,979.00
PU P40S 415V	Puma P40S 415V	\$6,962.73	\$7,659.00
PU P55S 415V	Puma P55S 415V	\$7,953.64	\$8,749.00
Air Compressor Accessories			
PU 12V BKSM	Puma 12 V Battery Kit - Small	\$415.45	\$457.00
PU 12V BKLG	Puma 12 V Battery Kit - Large	\$430.00	\$473.00
PU 12V BKSM-NB	Puma 12 V Connection Kit - Small	\$220.00	\$242.00
PU 12V BKLG-NB	Puma 12 V Connection Kit - Large	\$229.09	\$252.00
PU RVI KIT	Puma Vibration Isolator Kit	\$103.64	\$114.00

Electric Rotary Air Compressors





Energy Saving Technology

SENATOR

Outstanding Value

Electric Rotary Air Compressors



The all-new FS-Curtis NxB 4-in-1 compressed air stations feature innovative eCOOL technology and a compact, space-saving form factor. Efficient, quiet and powerful, these plug-and-play units are ideal for continuously loaded applications that require reliable performance in demanding conditions.


NxB-8-8-270
NxB-11-8-500
NxB-15-8-500

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	1.18 m³/min (42 cfm)	1.70 m³/min (60 cfm)	2.22 m³/min (78 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Tank Volume	270 Litres	500 Litres	500 Litres
Air Treatment	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters
Noise Level @ 1 m	65 dB(A)	66 dB(A)	68 dB(A)
Air Outlet	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	FS NxB-8-8-270	FS NxB-11-8-500	FS NxB-15-8-500

The all-new FS-Curtis NxV 4-in-1 compressed air stations feature an intelligent variable speed drive that can adjust the unit's output flowrate to match fluctuating air demand. This technology can typically reduce the compressor's electricity consumption and carbon footprint by up to 30% and save you money every day.



NxV-8-8-270



NxV-11-8-500



NxV-15-8-500

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.36-1.18 m³/min (13-42 cfm)	0.51-1.70 m³/min (18-60 cfm)	0.67-2.22 m³/min (24-78 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Tank Volume	270 Litres	500 Litres	500 Litres
Air Treatment	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters
Noise Level @ 1 m	65 dB(A)	66 dB(A)	68 dB(A)
Air Outlet	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	FS NxV-8-8-270	FS NxV-11-8-500	FS NxV-15-8-500

The FS-Curtis ECO Scroll Series comprises 100% oil-free air compressors offering superior energy efficiency, ease of operation, quietness and compactness in an environmentally responsible manner. They are perfect for applications where the highest standard of compressed air quality is critical.



ES04-8B



ES08-8B



ES11-8B

Motor Power	3.7 kW (5 hp)	7.5 kW (10 hp)	11 kW (15 hp)
Module Configuration	1 x 3.7 kW (1 x 5 hp)	2 x 3.7 kW (2 x 5 hp)	3 x 3.7 kW (3 x 5 hp)
Free Air Delivery	0.43 m³/min (15 cfm)	0.85 m³/min (30 cfm)	1.28 m³/min (45 cfm)
Maximum Pressure	800 kPa (116 psi)	800 kPa (116 psi)	800 kPa (116 psi)
Noise Level	57 dB(A)	59 dB(A)	61 dB(A)
L x W x H Dim's	640 x 604 x 895 mm	1,020 x 750 x 1,645 mm	1,600 x 750 x 1,830 mm
Weight	170 kg	440 kg	685 kg
Air Outlet	1/2 inch BSP	3/4 inch BSP	1 inch BSP
Product Code	FS ES04-8B	FS ES08-8B	FS ES11-8B



ES15-8B

Motor Power	15 kW (20 hp)
Module Configuration	4 x 3.7 kW (4 x 5 hp)
Free Air Delivery	1.70 m³/min (60 cfm)
Maximum Pressure	800 kPa (116 psi)
Noise Level	63 dB(A)
L x W x H Dim's	1,600 x 750 x 1,830 mm
Weight	770 kg
Air Outlet	1 inch BSP
Product Code	FS ES15-8B

The Senator DS Series comprises an extensive range of base-mounted compressor sets that can reliably withstand a 100% duty cycle in industrial applications. These all-new models are equipped with German-engineered air-ends to achieve the highest technological and quality standards.


DS4-8
DS6-8
DS8-8

Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.50 m³/min (18 cfm)	0.75 m³/min (26 cfm)	1.02 m³/min (36 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Noise Level @ 1 m	65 dB(A)	65 dB(A)	66 dB(A)
W x D x H Dim's	660 x 600 x 890 mm	660 x 600 x 890 mm	800 x 800 x 995 mm
Weight	209 kg	210 kg	312 kg
Air Outlet	1/2 inch BSP	1/2 inch BSP	3/4 inch BSP
Product Code	SE DS4-8	SE DS6-8	SE DS8-8


DS11-8
DS15-8
DS18-8

Motor Power	11 kW (15 hp)	15 kW (20 hp)	18.5 kW (25 hp)
Free Air Delivery	1.65 m³/min (58 cfm)	2.40 m³/min (85 cfm)	2.95 m³/min (104 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Noise Level @ 1 m	67 dB(A)	68 dB(A)	70 dB(A)
W x D x H Dim's	880 x 830 x 1,075 mm	880 x 830 x 1,075 mm	1,050 x 880 x 1,260 mm
Weight	362 kg	423 kg	502 kg
Air Outlet	3/4 inch BSP	3/4 inch BSP	1-1/4 inch BSP
Product Code	SE DS11-8	SE DS15-8	SE DS18-8


DS22-8

DS30-8

DS37-8

Motor Power	22 kW (30 hp)	30 kW (40 hp)	37 kW (50 hp)
Free Air Delivery	3.60 m³/min (127 cfm)	5.20 m³/min (184 cfm)	6.30 m³/min (222 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Noise Level @ 1 m	70 dB(A)	72 dB(A)	72 dB(A)
W x D x H Dim's	1,050 x 880 x 1,260 mm	1,000 x 1,250 x 1,310 mm	1,000 x 1,250 x 1,310 mm
Weight	529 kg	723 kg	751 kg
Air Outlet	1-1/4 inch BSP	1-1/2 inch BSP	1-1/2 inch BSP
Product Code	SE DS22-8	SE DS30-8	SE DS37-8


DS45-8

DS55-8

DS55-10

Motor Power	45 kW (60 hp)	55 kW (75 hp)	55 kW (75 hp)
Free Air Delivery	7.60 m³/min (268 cfm)	9.60 m³/min (339 cfm)	8.80 m³/min (311 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	10 bar (145 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	8 bar (116 psi) Maximum	10 bar (145 psi) Maximum
Noise Level @ 1 m	75 dB(A)	75 dB(A)	75 dB(A)
W x D x H Dim's	1,400 x 1,100 x 1,600 mm	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm
Weight	952 kg	1,500 kg	1,500 kg
Air Outlet	2 inch BSP	2 inch BSP	2 inch BSP
Product Code	SE DS45-8	SE DS55-8	SE DS55-10


DS55-13

DS75-8

DS75-10

Motor Power	55 kW (75 hp)	75 kW (100 hp)	75 kW (100 hp)
Free Air Delivery	8.10 m³/min (286 cfm)	13.00 m³/min (459 cfm)	11.70 m³/min (413 cfm)
Working Pressure	13 bar (189 psi)	8 bar (116 psi)	10 bar (145 psi)
Optional Pressures	13 bar (189 psi) Maximum	8 bar (116 psi) Maximum	10 bar (145 psi) Maximum
Noise Level @ 1 m	75 dB(A)	75 dB(A)	75 dB(A)
W x D x H Dim's	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm
Weight	1,500 kg	1,660 kg	1,660 kg
Air Outlet	2 inch BSP	2 inch BSP	2 inch BSP
Product Code	SE DS55-13	SE DS75-8	SE DS75-10


DS75-13

DS90-8

DS90-10

Motor Power	75 kW (100 hp)	90 kW (120 hp)	90 kW (120 hp)
Free Air Delivery	10.25 m³/min (362 cfm)	15.20 m³/min (537 cfm)	13.60 m³/min (480 cfm)
Working Pressure	13 bar (189 psi)	8 bar (116 psi)	10 bar (145 psi)
Optional Pressures	13 bar (189 psi) Maximum	8 bar (116 psi) Maximum	10 bar (145 psi) Maximum
Noise Level @ 1 m	75 dB(A)	75 dB(A)	75 dB(A)
W x D x H Dim's	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm
Weight	1,660 kg	1,680 kg	1,680 kg
Air Outlet	2 inch BSP	2 inch BSP	2 inch BSP
Product Code	SE DS75-13	SE DS90-8	SE DS90-10


DS90-13

Motor Power	90 kW (120 hp)
Free Air Delivery	12.30 m³/min (434 cfm)
Working Pressure	13 bar (189 psi)
Optional Pressures	13 bar (189 psi) Maximum
Noise Level @ 1 m	75 dB(A)
W x D x H Dim's	2,250 x 1,344 x 1,694 mm
Weight	1,680 kg
Air Outlet	2 inch BSP
Product Code	SE DS90-13

The all-new Senator DSV Series offers an energy-efficient range of base-mounted air compressor sets that are the smarter choice for most applications. Your total cost of ownership and CO₂ emissions will both be lower due to the reduced electricity consumption of these variable speed drive units.


DSV8-8
DSV11-8
DSV15-8

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.41-1.02 m³/min (14-36 cfm)	0.66-1.65 m³/min (23-58 cfm)	0.96-2.40 m³/min (34-85 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Noise Level @ 1 m	68 dB(A)	68 dB(A)	70 dB(A)
W x D x H Dim's	880 x 880 x 1,075 mm	880 x 880 x 1,075 mm	960 x 985 x 1,075 mm
Weight	318 kg	368 kg	451 kg
Air Outlet	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	SE DSV8-8	SE DSV11-8	SE DSV15-8


DSV18-8
DSV22-8
DSV30-8

Motor Power	18.5 kW (25 hp)	22 kW (30 hp)	30 kW (40 hp)
Free Air Delivery	1.18-2.95 m³/min (42-104 cfm)	1.44-3.60 m³/min (51-127 cfm)	2.08-5.20 m³/min (73-184 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)
Noise Level @ 1 m	70 dB(A)	70 dB(A)	72 dB(A)
W x D x H Dim's	1,140 x 880 x 1,260 mm	1,140 x 880 x 1,260 mm	1,000 x 1,250 x 1,310 mm
Weight	512 kg	548 kg	733 kg
Air Outlet	1-1/4 inch BSP	1-1/4 inch BSP	1-1/2 inch BSP
Product Code	SE DSV18-8	SE DSV22-8	SE DSV30-8


DSV37-8
DSV45-8
DSV55-8-10

Motor Power	37 kW (50 hp)	45 kW (60 hp)	55 kW (75 hp)
Free Air Delivery	2.52-6.30 m³/min (89-222 cfm)	3.04-7.60 m³/min (107-268 cfm)	3.84-9.60 m³/min (136-339 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	10 or 13 bar (145 or 189 psi)	10 or 13 bar (145 or 189 psi)	10 bar (145 psi)
Noise Level @ 1 m	72 dB(A)	75 dB(A)	75 dB(A)
W x D x H Dim's	1,000 x 1,250 x 1,310 mm	1,400 x 1,100 x 1,600 mm	2,250 x 1,344 x 1,694 mm
Weight	778 kg	989 kg	1,590 kg
Air Outlet	1-1/2 inch BSP	2 inch BSP	2 inch BSP
Product Code	SE DSV37-8	SE DSV45-8	SE DSV55-8-10


DSV55-13
DSV75-8-10
DSV75-13

Motor Power	55 kW (75 hp)	75 kW (100 hp)	75 kW (100 hp)
Free Air Delivery	3.24-8.10 m³/min (114-286 cfm)	5.20-13.00 m³/min (184-459 cfm)	4.10-10.25 m³/min (145-362 cfm)
Working Pressure	13 bar (189 psi)	8 bar (116 psi)	13 bar (189 psi)
Optional Pressures	13 bar (189 psi) Maximum	10 bar (145 psi)	13 bar (189 psi) Maximum
Noise Level @ 1 m	75 dB(A)	75 dB(A)	75 dB(A)
W x D x H Dim's	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm
Weight	1,590 kg	1,750 kg	1,750 kg
Air Outlet	2 inch BSP	2 inch BSP	2 inch BSP
Product Code	SE DSV55-13	SE DSV75-8-10	SE DSV75-13


DSV90-8-10
DSV90-13

Motor Power	90 kW (120 hp)	90 kW (120 hp)
Free Air Delivery	6.08-15.20 m³/min (215-537 cfm)	4.92-12.30 m³/min (174-434 cfm)
Working Pressure	8 bar (116 psi)	13 bar (189 psi)
Optional Pressures	10 bar (145 psi)	13 bar (189 psi) Maximum
Noise Level @ 1 m	75 dB(A)	75 dB(A)
W x D x H Dim's	2,250 x 1,344 x 1,694 mm	2,250 x 1,344 x 1,694 mm
Weight	1,770 kg	1,770 kg
Air Outlet	2 inch BSP	2 inch BSP
Product Code	SE DSV90-8-10	SE DSV90-13

The Senator GS-B series comprises five models of base-mounted rotary screw air compressor sets featuring a unique ultra-compact design ideal for applications with limited access or space for installation. Connect to downstream air storage and treatment for a complete compressed air system.



	GS4-B	GS6-B	GS8-B
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.60 m³/min (21 cfm)	0.82 m³/min (29 cfm)	1.10 m³/min (39 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	62 dB(A)	67 dB(A)	68 dB(A)
Air End Speed	1,961 rpm	2,755 rpm	3,434 rpm
Weight	232 kg	248 kg	268 kg
Air Outlet	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	SE GS4-B-8	SE GS6-B-8	SE GS8-B-8



	GS11-B	GS15-B
Motor Power	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	1.78 m³/min (63 cfm)	2.45 m³/min (87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	70 dB(A)	72 dB(A)
Air End Speed	2,744 rpm	3,763 rpm
Weight	370 kg	385 kg
Air Outlet	1 inch BSP	1 inch BSP
Product Code	SE GS11-B-8	SE GS15-B-8

The Senator GS series comprises five models of rotary screw air compressor sets that are fully integrated, tank-mounted units supplied ready for use. Their innovative design features an oversized 450 litre air tank in a compact package whose footprint is up to 30% smaller than traditional layouts.


GS4

GS6

GS8

Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.60 m³/min (21 cfm)	0.82 m³/min (29 cfm)	1.10 m³/min (39 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Tank Volume	450 Litres	450 Litres	450 Litres
Noise Level @ 1 m	62 dB(A)	67 dB(A)	68 dB(A)
Air End Speed	1,961 rpm	2,755 rpm	3,434 rpm
Air Outlet	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	SE GS4-8	SE GS6-8	SE GS8-8


GS11

GS15

Motor Power	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	1.78 m³/min (63 cfm)	2.45 m³/min (87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Tank Volume	450 Litres	450 Litres
Noise Level @ 1 m	70 dB(A)	72 dB(A)
Air End Speed	2,744 rpm	3,763 rpm
Air Outlet	1 inch BSP	1 inch BSP
Product Code	SE GS11-8	SE GS15-8

The Senator GSV-B base-mounted rotary screw air compressor sets feature a compact design layout ideal for installations where access or space is limited. Their well-proven variable speed drive technology saves energy by adjusting the compressor's output to match fluctuating air demand.


GSV8-B
GSV11-B
GSV15-B

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.44-1.10 m³/min (16-39 cfm)	0.71-1.78 m³/min (25-63 cfm)	0.98-2.45 m³/min (35-87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	69 dB(A)	71 dB(A)	73 dB(A)
Air End Speed	1,374 - 3,434 rpm	1,098 - 2,744 rpm	1,505 - 3,763 rpm
Weight	283 kg	391 kg	415 kg
Air Outlet	3/4 inch BSP	1 inch BSP	1 inch BSP
Product Code	SE GSV8-B-8	SE GSV11-B-8	SE GSV15-B-8

Combining proven energy-efficient variable speed drive technology with an oversized 450 litre air tank in a compact space-saving layout. The Senator GSV rotary screw air compressor sets are ideally configured for small-to-medium industrial applications that have fluctuating compressed air demands.


GSV8
GSV11
GSV15

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.44-1.10 m³/min (16-39 cfm)	0.71-1.78 m³/min (25-63 cfm)	0.98-2.45 m³/min (35-87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Tank Volume	450 Litres	450 Litres	450 Litres
Noise Level @ 1 m	69 dB(A)	71 dB(A)	73 dB(A)
Air End Speed	1,374 - 3,434 rpm	1,098 - 2,744 rpm	1,505 - 3,763 rpm
Air Outlet	3/4 inch BSP	1 inch BSP	1 inch BSP
Product Code	SE GSV8-8	SE GSV11-8	SE GSV15-8

The Senator CS series 4-in-1 air stations feature a rotary screw compressor, refrigerant dryer and both pre- and post-filters in a single package. Save on floor space and installation cost by choosing one of these ready-to-run units that will dependably provide your business with clean and dry compressed air.


CS4

CS6

CS8

Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.60 m³/min (21 cfm)	0.82 m³/min (29 cfm)	1.10 m³/min (39 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Tank Volume	600 Litres	600 Litres	600 Litres
Air Treatment	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters
Noise Level @ 1 m	62 dB(A)	67 dB(A)	68 dB(A)
Air Outlet	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	SE CS4-8	SE CS6-8	SE CS8-8


CS11

CS15

Motor Power	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	1.78 m³/min (63 cfm)	2.45 m³/min (87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Tank Volume	600 Litres	600 Litres
Air Treatment	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters
Noise Level @ 1 m	70 dB(A)	72 dB(A)
Air Outlet	1 inch BSP	1 inch BSP
Product Code	SE CS11-8	SE CS15-8

The Senator CSV series offers a great value choice of 4-in-1 industrial compressed air stations with energy-saving variable speed drive technology. Each unit comprises a rotary screw compressor, refrigerant dryer and both pre- and post-filters in an integrated package that's ready for plug-and-play installation.


CSV8
CSV11
CSV15

Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.44-1.10 m³/min (16-39 cfm)	0.71-1.78 m³/min (25-63 cfm)	0.98-2.45 m³/min (35-87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Tank Volume	600 Litres	600 Litres	600 Litres
Air Treatment	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters	Dryer, Pre- & Post-Filters
Noise Level @ 1 m	69 dB(A)	71 dB(A)	73 dB(A)
Air Outlet	3/4 inch BSP	1 inch BSP	1 inch BSP
Product Code	SE CSV8-8	SE CSV11-8	SE CSV15-8

Ideally suited for medium-to-large industrial applications with continuous compressed air demand and working pressure of up to 10 bar. The Senator LS series comprises seven models of electric rotary screw air compressor sets that are powerful, well equipped, base-mounted units supplied ready for use.


LS18

LS22

LS30

Motor Power	18.5 kW (25 hp)	22 kW (30 hp)	30 kW (40 hp)
Free Air Delivery	3.08 m³/min (109 cfm)	3.58 m³/min (127 cfm)	4.96 m³/min (175 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	70 dB(A)	71 dB(A)	71 dB(A)
Air End Speed	2,570 rpm	3,030 rpm	2,360 rpm
Weight	562 kg	636 kg	900 kg
Air Outlet	1 inch BSP	1 inch BSP	1-1/2 inch BSP
Product Code	SE LS18-8	SE LS22-8	SE LS30-8


LS37

LS45

LS55

Motor Power	37 kW (50 hp)	45 kW (60 hp)	55 kW (75 hp)
Free Air Delivery	6.38 m³/min (225 cfm)	7.18 m³/min (254 cfm)	9.58 m³/min (338 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	72 dB(A)	73 dB(A)	73 dB(A)
Air End Speed	3,118 rpm	3,581 rpm	2,350 rpm
Weight	916 kg	969 kg	1,419 kg
Air Outlet	1-1/2 inch BSP	1-1/2 inch BSP	2 inch BSP
Product Code	SE LS37-8	SE LS45-8	SE LS55-8



LS75

Motor Power	75 kW (100 hp)
Free Air Delivery	12.33 m ³ /min (435 cfm)
Working Pressure	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)
Noise Level @ 1 m	74 dB(A)
Air End Speed	3,097 rpm
Weight	1,579 kg
Air Outlet	2 inch BSP
Product Code	SE LS75-8

The Senator LSV series incorporates state-of-the-art variable speed drive technology that saves energy by adjusting the compressor's output to match fluctuating air demand. These well equipped, high efficiency compressor sets are the smart choice for industrial users who want to reduce their electricity costs.


LSV18
LSV22
LSV30

Motor Power	18.5 kW (25 hp)	22 kW (30 hp)	30 kW (40 hp)
Free Air Delivery	1.08 - 3.08 m³/min 38 - 109 cfm	1.25 - 3.58 m³/min 44 - 127 cfm	1.74 - 4.96 m³/min 61 - 175 cfm
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	71 dB(A)	71 dB(A)	71 dB(A)
Air End Speed	900 - 2,570 rpm	1,061 - 3,030 rpm	826 - 2,360 rpm
Air Outlet	1 inch BSP	1 inch BSP	1-1/2 inch BSP
Product Code	SE LSV18-8	SE LSV22-8	SE LSV30-8


LSV37
LSV45
LSV55

Motor Power	37 kW (50 hp)	45 kW (60 hp)	55 kW (75 hp)
Free Air Delivery	2.23 - 6.38 m³/min 79 - 225 cfm	2.51 - 7.18 m³/min 89 - 254 cfm	3.35 - 9.58 m³/min 118 - 338 cfm
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)	7-10 bar (102-145 psi)
Noise Level @ 1 m	71 dB(A)	72 dB(A)	73 dB(A)
Air End Speed	1,091 - 3,118 rpm	1,253 - 3,581 rpm	823 - 2,350 rpm
Air Outlet	1-1/2 inch BSP	1-1/2 inch BSP	2 inch BSP
Product Code	SE LSV37-8	SE LSV45-8	SE LSV55-8

**LSV75**

Motor Power	75 kW (100 hp)
Free Air Delivery	4.32 - 12.33 m³/min 152 - 435 cfm
Working Pressure	8 bar (116 psi)
Optional Pressures	7-10 bar (102-145 psi)
Noise Level @ 1 m	74 dB(A)
Air End Speed	1,084 - 3,097 rpm
Air Outlet	2 inch BSP
Product Code	SE LSV75-8

Product Code	Description	List Price Excl. GST	List Price Incl. GST
NxB Series Air Compressors			
FS NxB-8-8-270	FS-Curtis NxB-8-8-270	\$11,866.36	\$13,053.00
FS NxB-11-8-500	FS-Curtis NxB-11-8-500	\$13,464.55	\$14,811.00
FS NxB-15-8-500	FS-Curtis NxB-15-8-500	\$14,570.91	\$16,028.00
NxV Series Air Compressors			
FS NxV-8-8-270	FS-Curtis NxV-8-8-270	\$15,868.18	\$17,455.00
FS NxV-11-8-500	FS-Curtis NxV-11-8-500	\$17,861.82	\$19,648.00
FS NxV-15-8-500	FS-Curtis NxV-15-8-500	\$19,307.27	\$21,238.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
ECO Scroll Series Oil-Free Compressors			
FS ES04-8B	FS-Curtis ECO Scroll 04	\$9,326.36	\$10,259.00
FS ES08-8B	FS-Curtis ECO Scroll 08	\$17,653.64	\$19,419.00
FS ES11-8B	FS-Curtis ECO Scroll 11	\$25,840.00	\$28,424.00
FS ES15-8B	FS-Curtis ECO Scroll 15	\$29,966.36	\$32,963.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
GS-B Series Air Compressors			
SE GS4-B-8	Senator GS4-B	\$5,379.09	\$5,917.00
SE GS6-B-8	Senator GS6-B	\$5,710.91	\$6,282.00
SE GS8-B-8	Senator GS8-B	\$5,999.09	\$6,599.00
SE GS11-B-8	Senator GS11-B	\$7,707.27	\$8,478.00
SE GS15-B-8	Senator GS15-B	\$8,229.09	\$9,052.00
GSV-B Series Air Compressors			
SE GSV8-B-8	Senator GSV8-B	\$8,905.45	\$9,796.00
SE GSV11-B-8	Senator GSV11-B	\$11,215.45	\$12,337.00
SE GSV15-B-8	Senator GSV15-B	\$12,391.82	\$13,631.00
GS Series Air Compressors			
SE GS4-8	Senator GS4	\$7,264.55	\$7,991.00
SE GS6-8	Senator GS6	\$7,675.45	\$8,443.00
SE GS8-8	Senator GS8	\$7,880.91	\$8,669.00
SE GS11-8	Senator GS11	\$9,269.09	\$10,196.00
SE GS15-8	Senator GS15	\$10,121.82	\$11,134.00
GSV Series Air Compressors			
SE GSV8-8	Senator GSV8	\$11,279.09	\$12,407.00
SE GSV11-8	Senator GSV11	\$13,110.00	\$14,421.00
SE GSV15-8	Senator GSV15	\$14,372.73	\$15,810.00
CS Series Air Compressors			
SE CS4-8	Senator CS4	\$9,362.73	\$10,299.00
SE CS6-8	Senator CS6	\$10,030.91	\$11,034.00
SE CS8-8	Senator CS8	\$10,434.55	\$11,478.00
SE CS11-8	Senator CS11	\$11,577.27	\$12,735.00
SE CS15-8	Senator CS15	\$12,559.09	\$13,815.00
CSV Series Air Compressors			
SE CSV8-8	Senator CSV8	\$13,685.45	\$15,054.00
SE CSV11-8	Senator CSV11	\$15,760.00	\$17,336.00
SE CSV15-8	Senator CSV15	\$17,343.64	\$19,078.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
LS Series Air Compressors			
SE LS18-8	Senator LS18	\$9,822.73	\$10,805.00
SE LS22-8	Senator LS22	\$10,831.82	\$11,915.00
SE LS30-8	Senator LS30	\$14,492.73	\$15,942.00
SE LS37-8	Senator LS37	\$15,125.45	\$16,638.00
SE LS45-8	Senator LS45	\$16,405.45	\$18,046.00
SE LS55-8	Senator LS55	\$23,104.55	\$25,415.00
SE LS75-8	Senator LS75	\$26,434.55	\$29,078.00
LSV Series Air Compressors			
SE LSV18-8	Senator LSV18	\$12,537.27	\$13,791.00
SE LSV22-8	Senator LSV22	\$13,791.82	\$15,171.00
SE LSV30-8	Senator LSV30	\$17,539.09	\$19,293.00
SE LSV37-8	Senator LSV37	\$19,421.82	\$21,364.00
SE LSV45-8	Senator LSV45	\$21,565.45	\$23,722.00
SE LSV55-8	Senator LSV55	\$28,445.45	\$31,290.00
SE LSV75-8	Senator LSV75	\$33,680.91	\$37,049.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
DS Series Air Compressors			
SE DS4-8	Senator DS4-8	\$5,883.64	\$6,472.00
SE DS6-8	Senator DS6-8	\$6,076.36	\$6,684.00
SE DS8-8	Senator DS8-8	\$6,432.73	\$7,076.00
SE DS11-8	Senator DS11-8	\$8,130.00	\$8,943.00
SE DS15-8	Senator DS15-8	\$8,800.91	\$9,681.00
SE DS18-8	Senator DS18-8	\$10,268.18	\$11,295.00
SE DS22-8	Senator DS22-8	\$10,712.73	\$11,784.00
SE DS30-8	Senator DS30-8	\$13,596.36	\$14,956.00
SE DS37-8	Senator DS37-8	\$14,182.73	\$15,601.00
SE DS45-8	Senator DS45-8	\$17,431.82	\$19,175.00
SE DS55-8	Senator DS55-8	\$27,001.82	\$29,702.00
SE DS55-10	Senator DS55-10	\$27,001.82	\$29,702.00
SE DS55-13	Senator DS55-13	\$27,001.82	\$29,702.00
SE DS75-8	Senator DS75-8	\$30,800.00	\$33,880.00
SE DS75-10	Senator DS75-10	\$30,800.00	\$33,880.00
SE DS75-13	Senator DS75-13	\$30,800.00	\$33,880.00
SE DS90-8	Senator DS90-8	\$33,433.64	\$36,777.00
SE DS90-10	Senator DS90-10	\$33,433.64	\$36,777.00
SE DS90-13	Senator DS90-13	\$33,433.64	\$36,777.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
DSV Series Air Compressors			
SE DSV8-8	Senator DSV8-8	\$9,365.45	\$10,302.00
SE DSV11-8	Senator DSV11-8	\$11,401.82	\$12,542.00
SE DSV15-8	Senator DSV15-8	\$11,563.64	\$12,720.00
SE DSV18-8	Senator DSV18-8	\$13,583.64	\$14,942.00
SE DSV22-8	Senator DSV22-8	\$13,960.91	\$15,357.00
SE DSV30-8	Senator DSV30-8	\$19,008.18	\$20,909.00
SE DSV37-8	Senator DSV37-8	\$19,864.55	\$21,851.00
SE DSV45-8	Senator DSV45-8	\$23,129.09	\$25,442.00
SE DSV55-8-10	Senator DSV55-8-10	\$32,960.00	\$36,256.00
SE DSV55-13	Senator DSV55-13	\$32,960.00	\$36,256.00
SE DSV75-8-10	Senator DSV75-8-10	\$38,810.91	\$42,692.00
SE DSV75-13	Senator DSV75-13	\$38,810.91	\$42,692.00
SE DSV90-8-10	Senator DSV90-8-10	\$42,095.45	\$46,305.00
SE DSV90-13	Senator DSV90-13	\$42,095.45	\$46,305.00

Compressed Air System Packages





Premium Quality



Excellence Since 1953



Energy Saving Technology



Dependable Performance



Outstanding Value

Compressed Air System Packages



These packages are recommended for premium industrial compressed air systems up to 1.75 m³/min. Each comprises an Airmac reciprocating compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for pneumatic tools and machinery and also for spray painting.



T20 415V PRO PKG

HT20 415V PRO PKG

B23 415V PRO PKG

Air Compressor	AM T20 415V	AM HT20 415V	AM B23 415V
Motor Power	2.2 kW (3 hp)	2.2 kW (3 hp)	3 kW (4 hp)
Free Air Delivery	310 L/min (11.0 cfm)	260 L/min (9.2 cfm)	325 L/min (11.5 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,200 kPa (175 psi)
Pre Filter	T5P, 3 Micron Particulate	T5P, 3 Micron Particulate	T5P, 3 Micron Particulate
Refrigerant Dryer	Fusheng FR005A	SMC IDFA4E-23-LR	SMC IDFA4E-23-LR
Post Filter	T5U, 1 Micron Coalescing	T5U, 1 Micron Coalescing	T5U, 1 Micron Coalescing
Product Code	AM T20 415V PKG	AM HT20 415V PKG	AM B23 415V PKG



V25 415V PRO PKG

B29 415V PRO PKG

T30 415V PRO PKG

Air Compressor	AM V25 415V	AM B29 415V	AM T30 415V
Motor Power	3 kW (4 hp)	4 kW (5.5 hp)	4 kW (5.5 hp)
Free Air Delivery	465 L/min (16.4 cfm)	555 L/min (19.6 cfm)	620 L/min (21.9 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
Pre Filter	T5P, 3 Micron Particulate	T5P, 3 Micron Particulate	T5P, 3 Micron Particulate
Refrigerant Dryer	Fusheng FR005A	SMC IDFA4E-23-LR	Fusheng FR005A
Post Filter	T5U, 1 Micron Coalescing	T5U, 1 Micron Coalescing	T5U, 1 Micron Coalescing
Product Code	AM V25 415V PKG	AM B29 415V PKG	AM T30 415V PKG

**V40 415V PRO PKG****B52 415V PRO PKG****T55 415V PRO PKG**

Air Compressor	AM V40 415V	AM B52 415V	AM T55 415V
Motor Power	5.5 kW (7.5 hp)	7.5 kW (10 hp)	7.5 kW (10 hp)
Free Air Delivery	825 L/min (29.2 cfm)	1,050 L/min (37.1 cfm)	1,245 L/min (44.0 cfm)
Maximum Pressure	1,000 kPa (145 psi)	1,200 kPa (175 psi)	1,000 kPa (145 psi)
Pre Filter	T10P, 3 Micron Particulate	T10P, 3 Micron Particulate	T10P, 3 Micron Particulate
Refrigerant Dryer	Fusheng FR010A	SMC IDFA8E-23-LR	Fusheng FR010A
Post Filter	T10U, 1 Micron Coalescing	T10U, 1 Micron Coalescing	T10U, 1 Micron Coalescing
Product Code	AM V40 415V PKG	AM B52 415V PKG	AM T55 415V PKG

**T75 415V PRO PKG**

Air Compressor	AM T75 415V
Motor Power	11 kW (15 hp)
Free Air Delivery	1,750 L/min (61.8 cfm)
Maximum Pressure	1,000 kPa (145 psi)
Pre Filter	T15P, 3 Micron Particulate
Refrigerant Dryer	Fusheng FR020A
Post Filter	T15U, 1 Micron Coalescing
Product Code	AM T75 415V PKG

A popular choice for industrial applications with compressed air demand of up to 1.52 m³/min. Each package features a Puma reciprocating compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for powering pneumatic tools and machinery and also for spray painting.



P25 415V PRO PKG

P30 415V PRO PKG

P40 415V PRO PKG

Air Compressor	PU P25 415V	PU P30 415V	PU P40 415V
Motor Power	3 kW (4 hp)	4 kW (5.5 hp)	5.5 kW (7.5 hp)
Free Air Delivery	390 L/min (13.8 cfm)	520 L/min (18.4 cfm)	760 L/min (26.9 cfm)
Maximum Pressure	900 kPa (130 psi)	900 kPa (130 psi)	900 kPa (130 psi)
Pre Filter	T5P, 3 Micron Particulate	T5P, 3 Micron Particulate	T10P, 3 Micron Particulate
Refrigerant Dryer	FR005A	FR005A	FR010A
Post Filter	T5U, 1 Micron Coalescing	T5U, 1 Micron Coalescing	T10U, 1 Micron Coalescing
Product Code	PU P25 415V PKG	PU P30 415V PKG	PU P40 415V PKG



P55 415V PRO PKG

P75 415V PRO PKG

Air Compressor	PU P55 415V	PU P75 415V
Motor Power	7.5 kW (10 hp)	11 kW (15 hp)
Free Air Delivery	1,055 L/min (37.3 cfm)	1,520 L/min (53.7 cfm)
Maximum Pressure	900 kPa (130 psi)	900 kPa (130 psi)
Pre Filter	T10P, 3 Micron Particulate	T15P, 3 Micron Particulate
Refrigerant Dryer	FR010A	FR020A
Post Filter	T10U, 1 Micron Coalescing	T15U, 1 Micron Coalescing
Product Code	PU P55 415V PKG	PU P75 415V PKG

Ideal for noise sensitive workplace applications up to 1.1 m³/min where there is no need for treatment of the compressed air, such as air cleaning and dusting, pneumatic transfer pumping and liquid waste aeration. Each package comprises a Puma 415 Volt Silent reciprocating air compressor and vertical air receiver.



P30S 415V BAS PKG

P40S 415V BAS PKG

P55S 415V BAS PKG

Air Compressor	PU P30S 415V	PU P40S 415V	PU P55S 415V
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	520 L/min (18.4 cfm)	760 L/min (26.9 cfm)	1,055 L/min (37.3 cfm)
Maximum Pressure	930 kPa (135 psi)	930 kPa (135 psi)	930 kPa (135 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Product Code	PU P30S 415V BPG	PU P40S 415V BPG	PU P55S 415V BPG

These packages are ideal for low noise workplace applications requiring up to 1.1 m³/min of clean, dry compressed air. A Puma 415 Volt Silent reciprocating air compressor, vertical air receiver, refrigerant dryer and two stages of filtration are included. Suitable for use with pneumatic tools / machinery and for spray painting.



P30S 415V PRO PKG

P40S 415V PRO PKG

P55S 415V PRO PKG

Air Compressor	PU P30S 415V	PU P40S 415V	PU P55S 415V
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	520 L/min (18.4 cfm)	760 L/min (26.9 cfm)	1,055 L/min (37.3 cfm)
Maximum Pressure	930 kPa (135 psi)	930 kPa (135 psi)	930 kPa (135 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Pre Filter	T5P, 3 Micron Particulate	T10P, 3 Micron Particulate	T10P, 3 Micron Particulate
Refrigerant Dryer	FR005A	FR010A	FR010A
Post Filter	T5U, 1 Micron Coalescing	T10U, 1 Micron Coalescing	T10U, 1 Micron Coalescing
Product Code	PU P30S 415V PKG	PU P40S 415V PKG	PU P55S 415V PKG

The latest solution from Senator for applications with stable compressed air demand up to 15.2 m³/min. Each package comprises a DS Series screw compressor, vertical air receiver, refrigerant dryer and two in-line filters. Users can depend on these for clean, dry compressed air and low operating noise level.


DS4-8 PKG
DS6-8 PKG
DS8-8 PKG

Air Compressor	SE DS4-8	SE DS6-8	SE DS8-8
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.50 m³/min (18 cfm)	0.75 m³/min (26 cfm)	1.02 m³/min (36 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Pre Filter	T5U, 1 Micron Coalescing	T10U, 1 Micron Coalescing	T10U, 1 Micron Coalescing
Refrigerant Dryer	FR005A	FR010A	FR010A
Post Filter	T5H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing
Product Code	SE DS4-8 PKG	SE DS6-8 PKG	SE DS8-8 PKG


DS11-8 PKG
DS15-8 PKG
DS18-8 PKG

Air Compressor	SE DS11-8	SE DS15-8	SE DS18-8
Motor Power	11 kW (15 hp)	15 kW (20 hp)	18.5 kW (25 hp)
Free Air Delivery	1.65 m³/min (58 cfm)	2.40 m³/min (85 cfm)	2.95 m³/min (104 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit
Pre Filter	T15U, 1 Micron Coalescing	T20U, 1 Micron Coalescing	T40U, 1 Micron Coalescing
Refrigerant Dryer	FR020A	FR020A	FR030A
Post Filter	T15H, 0.01 Micron Coalescing	T20H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing
Product Code	SE DS11-8 PKG	SE DS15-8 PKG	SE DS18-8 PKG


DS22-8 PKG
DS30-8 PKG
DS37-8 PKG

Air Compressor	SE DS22-8	SE DS30-8	SE DS37-8
Motor Power	22 kW (30 hp)	30 kW (40 hp)	37 kW (50 hp)
Free Air Delivery	3.60 m³/min (127 cfm)	5.20 m³/min (184 cfm)	6.30 m³/min (222 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	500 Litres c/w Accessory Kit	800 Litres c/w Accessory Kit	800 Litres c/w Accessory Kit
Pre Filter	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing	T60U, 1 Micron Coalescing
Refrigerant Dryer	FR030A	FR050A	FR050A
Post Filter	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing	T60H, 0.01 Micron Coalescing
Product Code	SE DS22-8 PKG	SE DS30-8 PKG	SE DS37-8 PKG


DS45-8 PKG
DS55-8 PKG
DS55-10 PKG

Air Compressor	SE DS45-8	SE DS55-8	SE DS55-10
Motor Power	45 kW (60 hp)	55 kW (75 hp)	55 kW (75 hp)
Free Air Delivery	7.60 m³/min (268 cfm)	9.60 m³/min (339 cfm)	8.80 m³/min (311 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	10 bar (145 psi)
Vertical Air Receiver	1,000 Litres c/w Accessory Kit	1,200 Litres c/w Accessory Kit	1,200 Litres c/w Accessory Kit
Pre Filter	T60U, 1 Micron Coalescing	T75U, 1 Micron Coalescing	T75U, 1 Micron Coalescing
Refrigerant Dryer	FR075A	FR075A	FR075A
Post Filter	T60H, 0.01 Micron Coalescing	T75H, 0.01 Micron Coalescing	T75H, 0.01 Micron Coalescing
Product Code	SE DS45-8 PKG	SE DS55-8 PKG	SE DS55-10 PKG


DS75-8 PKG
DS75-10 PKG
DS90-8 PKG

Air Compressor	SE DS75-8	SE DS75-10	SE DS90-8
Motor Power	75 kW (100 hp)	75 kW (100 hp)	90 kW (120 hp)
Free Air Delivery	13.00 m³/min (459 cfm)	11.70 m³/min (413 cfm)	15.20 m³/min (537 cfm)
Working Pressure	8 bar (116 psi)	10 bar (145 psi)	8 bar (116 psi)
Vertical Air Receiver	2,000 Litres c/w Accessory Kit	2,000 Litres c/w Accessory Kit	2,000 Litres c/w Accessory Kit
Pre Filter	T125U, 1 Micron Coalescing	T125U, 1 Micron Coalescing	T175U, 1 Micron Coalescing
Refrigerant Dryer	FR100A	FR100A	FR150A
Post Filter	T125H, 0.01 Micron Coalescing	T125H, 0.01 Micron Coalescing	T175H, 0.01 Micron Coalescing
Product Code	SE DS75-8 PKG	SE DS75-10 PKG	SE DS90-8 PKG


DS90-10 PKG

Air Compressor	SE DS90-10
Motor Power	90 kW (120 hp)
Free Air Delivery	13.60 m³/min (480 cfm)
Working Pressure	10 bar (145 psi)
Vertical Air Receiver	2,000 Litres c/w Accessory Kit
Pre Filter	T175U, 1 Micron Coalescing
Refrigerant Dryer	FR150A
Post Filter	T175H, 0.01 Micron Coalescing
Product Code	SE DS90-10 PKG

The latest energy saving solution for industrial applications with fluctuating compressed air demand up to 15.2 m³/min. Each package comprises a Senator DSV Series variable speed screw compressor, vertical air receiver, refrigerant dryer and two in-line filters. Clean, dry compressed air at low whole-of-life cost.


DSV8-8 PKG
DSV11-8 PKG
DSV15-8 PKG

Air Compressor	SE DSV8-8	SE DSV11-8	SE DSV15-8
Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.41-1.02 m³/min (14-36 cfm)	0.66-1.65 m³/min (23-58 cfm)	0.96-2.40 m³/min (34-85 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Pre Filter	T10U, 1 Micron Coalescing	T15U, 1 Micron Coalescing	T20U, 1 Micron Coalescing
Refrigerant Dryer	FR010A	FR020A	FR020A
Post Filter	T10H, 0.01 Micron Coalescing	T15H, 0.01 Micron Coalescing	T20H, 0.01 Micron Coalescing
Product Code	SE DSV8-8 PKG	SE DSV11-8 PKG	SE DSV15-8 PKG


DSV18-8 PKG
DSV22-8 PKG
DSV30-8 PKG

Air Compressor	SE DSV18-8	SE DSV22-8	SE DSV30-8
Motor Power	18.5 kW (25 hp)	22 kW (30 hp)	30 kW (40 hp)
Free Air Delivery	1.18-2.95 m³/min (42-104 cfm)	1.44-3.60 m³/min (51-127 cfm)	2.08-5.20 m³/min (73-184 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	500 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit	800 Litres c/w Accessory Kit
Pre Filter	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing
Refrigerant Dryer	FR030A	FR030A	FR050A
Post Filter	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing
Product Code	SE DSV18-8 PKG	SE DSV22-8 PKG	SE DSV30-8 PKG


DSV37-8 PKG
DSV45-8 PKG
DSV55-8-10 PKG

Air Compressor	SE DSV37-8	SE DSV45-8	SE DSV55-8-10
Motor Power	37 kW (50 hp)	45 kW (60 hp)	55 kW (75 hp)
Free Air Delivery	2.52-6.30 m ³ /min (89-222 cfm)	3.04-7.60 m ³ /min (107-268 cfm)	3.84-9.60 m ³ /min (136-339 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	800 Litres c/w Accessory Kit	1,000 Litres c/w Accessory Kit	1,200 Litres c/w Accessory Kit
Pre Filter	T60U, 1 Micron Coalescing	T60U, 1 Micron Coalescing	T75U, 1 Micron Coalescing
Refrigerant Dryer	FR050A	FR075A	FR075A
Post Filter	T60H, 0.01 Micron Coalescing	T60H, 0.01 Micron Coalescing	T75H, 0.01 Micron Coalescing
Product Code	SE DSV37-8 PKG	SE DSV45-8 PKG	SE DSV55-8-10 PKG


DSV75-8-10 PKG
DSV90-8-10 PKG

Air Compressor	SE DSV75-8-10	SE DSV90-8-10
Motor Power	75 kW (100 hp)	90 kW (120 hp)
Free Air Delivery	5.20-13.00 m ³ /min (184-459 cfm)	6.08-15.20 m ³ /min (215-537 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	2,000 Litres c/w Accessory Kit	2,000 Litres c/w Accessory Kit
Pre Filter	T125U, 1 Micron Coalescing	T175U, 1 Micron Coalescing
Refrigerant Dryer	FR100A	FR150A
Post Filter	T125H, 0.01 Micron Coalescing	T175H, 0.01 Micron Coalescing
Product Code	SE DSV75-8-10 PKG	SE DSV90-8-10 PKG

A premium value choice for standard industrial compressed air systems in the 0.6 to 2.45 m³/min range. Each package includes a Senator GS Series tank-mounted screw compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for most pneumatic applications.


GS4 PRO PKG
GS6 PRO PKG
GS8 PRO PKG

Air Compressor	SE GS4-8	SE GS6-8	SE GS8-8
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.60 m³/min (21 cfm)	0.82 m³/min (29 cfm)	1.10 m³/min (39 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Tank Volume	450 Litres	450 Litres	450 Litres
Pre Filter	T5U, 1 Micron Coalescing	T10U, 1 Micron Coalescing	T10U, 1 Micron Coalescing
Refrigerant Dryer	FR005A	FR010A	FR010A
Post Filter	T5H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing
Product Code	SE GS4-8 PKG	SE GS6-8 PKG	SE GS8-8 PKG


GS11 PRO PKG
GS15 PRO PKG

Air Compressor	SE GS11-8	SE GS15-8
Motor Power	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	1.78 m³/min (63 cfm)	2.45 m³/min (87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)
Tank Volume	450 Litres	450 Litres
Pre Filter	T15U, 1 Micron Coalescing	T20U, 1 Micron Coalescing
Refrigerant Dryer	FR020A	FR020A
Post Filter	T15H, 0.01 Micron Coalescing	T20H, 0.01 Micron Coalescing
Product Code	SE GS11-8 PKG	SE GS15-8 PKG

A premium value choice for standard industrial compressed air systems in the 0.6 to 2.45 m³/min range. Each package includes a Senator GS-B Series base-mounted screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration to reliably provide clean, dry compressed air.


GS4-B PRO PKG
GS6-B PRO PKG
GS8-B PRO PKG

Air Compressor	SE GS4-B-8	SE GS6-B-8	SE GS8-B-8
Motor Power	4 kW (5.5 hp)	5.5 kW (7.5 hp)	7.5 kW (10 hp)
Free Air Delivery	0.60 m³/min (21 cfm)	0.82 m³/min (29 cfm)	1.10 m³/min (39 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Pre Filter	T5U, 1 Micron Coalescing	T10U, 1 Micron Coalescing	T10U, 1 Micron Coalescing
Refrigerant Dryer	FR005A	FR010A	FR010A
Post Filter	T5H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing
Product Code	SE GS4-B-8 PKG	SE GS6-B-8 PKG	SE GS8-B-8 PKG


GS11-B PRO PKG
GS15-B PRO PKG

Air Compressor	SE GS11-B-8	SE GS15-B-8
Motor Power	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	1.78 m³/min (63 cfm)	2.45 m³/min (87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Pre Filter	T15U, 1 Micron Coalescing	T20U, 1 Micron Coalescing
Refrigerant Dryer	FR020A	FR020A
Post Filter	T15H, 0.01 Micron Coalescing	T20H, 0.01 Micron Coalescing
Product Code	SE GS11-B-8 PKG	SE GS15-B-8 PKG

A smart value choice for energy saving compressed air systems in the 1.10 to 2.45 m³/min range. Each package includes a Senator GSV Series variable speed screw compressor, refrigerant dryer and two stages of filtration. The clean, dry compressed air is suitable for most pneumatic applications.



GSV8 PRO PKG

GSV11 PRO PKG

GSV15 PRO PKG

Air Compressor	SE GSV8-8	SE GSV11-8	SE GSV15-8
Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.44 - 1.10 m³/min (16 - 39 cfm)	0.71 - 1.78 m³/min (25 - 63 cfm)	0.98 - 2.45 m³/min (35 - 87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Tank Volume	450 Litres	450 Litres	450 Litres
Pre Filter	T10U, 1 Micron Coalescing	T15U, 1 Micron Coalescing	T20U, 1 Micron Coalescing
Refrigerant Dryer	FR010A	FR020A	FR020A
Post Filter	T10H, 0.01 Micron Coalescing	T15H, 0.01 Micron Coalescing	T20H, 0.01 Micron Coalescing
Product Code	SE GSV8-8 PKG	SE GSV11-8 PKG	SE GSV15-8 PKG

A smart value choice for energy saving compressed air systems in the 1.10 to 2.45 m³/min range. Each package includes a Senator GSV-B Series base-mounted variable speed screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration to reliably provide clean, dry compressed air.


GSV8-B PRO PKG
GSV11-B PRO PKG
GSV15-B PRO PKG

Air Compressor	SE GSV8-B-8	SE GSV11-B-8	SE GSV15-B-8
Motor Power	7.5 kW (10 hp)	11 kW (15 hp)	15 kW (20 hp)
Free Air Delivery	0.44 - 1.10 m³/min (16 - 39 cfm)	0.71 - 1.78 m³/min (25 - 63 cfm)	0.98 - 2.45 m³/min (35 - 87 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit
Pre Filter	T10U, 1 Micron Coalescing	T15U, 1 Micron Coalescing	T20U, 1 Micron Coalescing
Refrigerant Dryer	FR010A	FR020A	FR020A
Post Filter	T10H, 0.01 Micron Coalescing	T15H, 0.01 Micron Coalescing	T20H, 0.01 Micron Coalescing
Product Code	SE GSV8-B-8 PKG	SE GSV11-B-8 PKG	SE GSV15-B-8 PKG

Recommended for industrial applications with stable compressed air demand up to 12.33 m³/min. Each package comprises a Senator LS Series screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration. Users can depend on these for clean, dry compressed air and low operating noise level.


LS18 PRO PKG
LS22 PRO PKG
LS30 PRO PKG

Air Compressor	SE LS18-8	SE LS22-8	SE LS30-8
Motor Power	18.5 kW (25 hp)	22 kW (30 hp)	30 kW (40 hp)
Free Air Delivery	3.08 m³/min (109 cfm)	3.58 m³/min (127 cfm)	4.96 m³/min (175 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit
Pre Filter	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing
Refrigerant Dryer	FR030A	FR030A	FR050A
Post Filter	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing
Product Code	SE LS18-8 PKG	SE LS22-8 PKG	SE LS30-8 PKG


LS37 PRO PKG
LS45 PRO PKG
LS55 PRO PKG

Air Compressor	SE LS37-8	SE LS45-8	SE LS55-8
Motor Power	37 kW (50 hp)	45 kW (60 hp)	55 kW (75 hp)
Free Air Delivery	6.38 m³/min (225 cfm)	7.18 m³/min (254 cfm)	9.58 m³/min (338 cfm)
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	800 Litres c/w Accessory Kit	800 Litres c/w Accessory Kit	1,200 Litres c/w Accessory Kit
Pre Filter	T60U, 1 Micron Coalescing	T60U, 1 Micron Coalescing	T75U, 1 Micron Coalescing
Refrigerant Dryer	FR050A	FR075A	FR075A
Post Filter	T60H, 0.01 Micron Coalescing	T60H, 0.01 Micron Coalescing	T75H, 0.01 Micron Coalescing
Product Code	SE LS37-8 PKG	SE LS45-8 PKG	SE LS55-8 PKG



LS75 PRO PKG

Air Compressor	SE LS75-8
Motor Power	75 kW (100 hp)
Free Air Delivery	12.33 m³/min (435 cfm)
Working Pressure	8 bar (116 psi)
Vertical Air Receiver	1,200 Litres c/w Accessory Kit
Pre Filter	T125U, 1 Micron Coalescing
Refrigerant Dryer	FR100A
Post Filter	T125H, 0.01 Micron Coalescing
Product Code	SE LS75-8 PKG

A smart energy saving solution for industrial applications with fluctuating compressed air demand up to 12.33 m³/min. Each package comprises a Senator LSV Series variable speed screw compressor, vertical air receiver, refrigerant dryer and two stages of filtration. Clean, dry compressed air at low whole-of-life cost.



LSV18 PRO PKG

LSV22 PRO PKG

LSV30 PRO PKG

Air Compressor	SE LSV18-8	SE LSV22-8	SE LSV30-8
Motor Power	18.5 kW (25 hp)	22 kW (30 hp)	30 kW (40 hp)
Free Air Delivery	1.08 - 3.08 m³/min	1.25 - 3.58 m³/min	1.74 - 4.96 m³/min
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	300 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit
Pre Filter	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing	T40U, 1 Micron Coalescing
Refrigerant Dryer	FR030A	FR030A	FR050A
Post Filter	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing	T40H, 0.01 Micron Coalescing
Product Code	SE LSV18-8 PKG	SE LSV22-8 PKG	SE LSV30-8 PKG



LSV37 PRO PKG

LSV45 PRO PKG

LSV55 PRO PKG

Air Compressor	SE LSV37-8	SE LSV45-8	SE LSV55-8
Motor Power	37 kW (50 hp)	45 kW (60 hp)	55 kW (75 hp)
Free Air Delivery	2.23 - 6.38 m³/min	2.51 - 7.18 m³/min	3.35 - 9.58 m³/min
Working Pressure	8 bar (116 psi)	8 bar (116 psi)	8 bar (116 psi)
Vertical Air Receiver	800 Litres c/w Accessory Kit	800 Litres c/w Accessory Kit	1,200 Litres c/w Accessory Kit
Pre Filter	T60U, 1 Micron Coalescing	T60U, 1 Micron Coalescing	T75U, 1 Micron Coalescing
Refrigerant Dryer	FR050A	FR075A	FR075A
Post Filter	T60H, 0.01 Micron Coalescing	T60H, 0.01 Micron Coalescing	T75H, 0.01 Micron Coalescing
Product Code	SE LSV37-8 PKG	SE LSV45-8 PKG	SE LSV55-8 PKG



LSV75 PRO PKG

Air Compressor	SE LSV75-8
Motor Power	75 kW (100 hp)
Free Air Delivery	4.32 - 12.33 m ³ /min
Working Pressure	8 bar (116 psi)
Vertical Air Receiver	1,200 Litres c/w Accessory Kit
Pre Filter	T125U, 1 Micron Coalescing
Refrigerant Dryer	FR100A
Post Filter	T125H, 0.01 Micron Coalescing
Product Code	SE LSV75-8 PKG

Ideal for applications where the highest standard of compressed air quality is critical such as dental and medical, food and beverage, and chemical and pharmaceutical facilities. Each package comprises an ultra-quiet FS-Curtis oil-free scroll compressor, vertical air receiver, refrigerant dryer and four stages of filtration.



ES04-8B ULT PKG



ES08-8B ULT PKG



ES11-8B ULT PKG

Air Compressor	FS ES04-8B 3.7 kW (5 hp)	FS ES08-8B 7.5 kW (10 hp)	FS ES11-8B 11 kW (15 hp)
Free Air Delivery	0.43 m³/min (15 cfm)	0.85 m³/min (30 cfm)	1.28 m³/min (45 cfm)
Vertical Air Receiver	150 Litres c/w Accessory Kit	300 Litres c/w Accessory Kit	500 Litres c/w Accessory Kit
Pre Filter	T5P, 3 Micron Particulate	T10P, 3 Micron Particulate	T15P, 3 Micron Particulate
Refrigerant Dryer	FR005A	FR010A	FR020A
Post Filter #1	T5U, 1 Micron Coalescing	T10U, 1 Micron Coalescing	T15U, 1 Micron Coalescing
Post Filter #2	T5H, 0.01 Micron Coalescing	T10H, 0.01 Micron Coalescing	T15U, 0.01 Micron Coalescing
Post Filter #3	T5C, Activated Carbon	T10C, Activated Carbon	T15C, Activated Carbon
Product Code	FS ES04-8B PKG	FS ES08-8B PKG	FS ES11-8B PKG



ES15-8B ULT PKG

Air Compressor	FS ES15-8B 15 kW (20 hp)
Free Air Delivery	1.70 m³/min (60 cfm)
Vertical Air Receiver	500 Litres c/w Accessory Kit
Pre Filter	T20P, 3 Micron Particulate
Refrigerant Dryer	FR020A
Post Filter #1	T20U, 1 Micron Coalescing
Post Filter #2	T20H, 0.01 Micron Coalescing
Post Filter #3	T20C, Activated Carbon
Product Code	FS ES15-8B PKG



Compressed Air System Packages

Product Code	Description	List Price Excl. GST	List Price Incl. GST
415 Volt Professional Packages			
AM T20 415V PKG	Airmac T20 415 V Professional Package	\$5,757.27	\$6,333.00
AM HT20 415V PKG	Airmac HT20 415 V Professional Package	\$5,743.63	\$6,318.00
AM B23 415V PKG	Airmac B23 415 V Professional Package	\$6,479.99	\$7,128.00
AM V25 415V PKG	Airmac V25 415 V Professional Package	\$6,520.91	\$7,173.00
AM B29 415V PKG	Airmac B29 415 V Professional Package	\$7,316.36	\$8,048.00
AM T30 415V PKG	Airmac T30 415 V Professional Package	\$7,602.73	\$8,363.00
AM V40 415V PKG	Airmac V40 415 V Professional Package	\$9,731.80	\$10,705.00
AM B52 415V PKG	Airmac B52 415 V Professional Package	\$11,224.53	\$12,347.00
AM T55 415V PKG	Airmac T55 415 V Professional Package	\$11,659.07	\$12,825.00
AM T75 415V PKG	Airmac T75 415 V Professional Package	\$15,945.44	\$17,540.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
415 Volt Professional Packages			
PU P25 415V PKG	Puma P25 415V Professional Package	\$5,748.18	\$6,323.00
PU P30 415V PKG	Puma P30 415V Professional Package	\$6,475.46	\$7,123.00
PU P40 415V PKG	Puma P40 415V Professional Package	\$8,431.80	\$9,275.00
PU P55 415V PKG	Puma P55 415V Professional Package	\$9,168.17	\$10,085.00
PU P75 415V PKG	Puma P75 415V Professional Package	\$13,018.17	\$14,320.00
415 Volt Silent Basic Packages			
PU P30S 415V BPG	Puma P30S 415V Silent Basic Package	\$7,077.27	\$7,785.00
PU P40S 415V BPG	Puma P40S 415V Silent Basic Package	\$8,604.55	\$9,465.00
PU P55S 415V BPG	Puma P55S 415V Silent Basic Package	\$9,595.46	\$10,555.00
415 Volt Silent Professional Packages			
PU P30S 415V PKG	Puma P30S 415V Silent Professional Package	\$10,199.09	\$11,219.00
PU P40S 415V PKG	Puma P40S 415V Silent Professional Package	\$12,628.17	\$13,891.00
PU P55S 415V PKG	Puma P55S 415V Silent Professional Package	\$13,619.08	\$14,981.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
GS-B Series Professional Packages			
SE GS4-B-8 PKG	Senator GS4-B-8 Professional Package	\$10,142.73	\$11,157.00
SE GS6-B-8 PKG	Senator GS6-B-8 Professional Package	\$11,376.35	\$12,514.00
SE GS8-B-8 PKG	Senator GS8-B-8 Professional Package	\$11,664.53	\$12,831.00
SE GS11-B-8 PKG	Senator GS11-B-8 Professional Package	\$14,386.35	\$15,825.00
SE GS15-B-8 PKG	Senator GS15-B-8 Professional Package	\$15,497.27	\$17,047.00
GSV-B Series Professional Packages			
SE GSV8-B-8 PKG	Senator GSV8-B-8 Professional Package	\$14,570.89	\$16,028.00
SE GSV11-B-8 PKG	Senator GSV11-B-8 Professional Package	\$17,894.53	\$19,684.00
SE GSV15-B-8 PKG	Senator GSV15-B-8 Professional Package	\$19,660.00	\$21,626.00
GS Series Professional Packages			
SE GS4-8 PKG	Senator GS4-8 Professional Package	\$10,386.37	\$11,425.00
SE GS6-8 PKG	Senator GS6-8 Professional Package	\$11,699.07	\$12,869.00
SE GS8-8 PKG	Senator GS8-8 Professional Package	\$11,904.53	\$13,095.00
SE GS11-8 PKG	Senator GS11-8 Professional Package	\$14,306.35	\$15,737.00
SE GS15-8 PKG	Senator GS15-8 Professional Package	\$15,748.18	\$17,323.00
GSV Series Professional Packages			
SE GSV8-8 PKG	Senator GSV8-8 Professional Package	\$15,302.71	\$16,833.00
SE GSV11-8 PKG	Senator GSV11-8 Professional Package	\$18,147.26	\$19,962.00
SE GSV15-8 PKG	Senator GSV15-8 Professional Package	\$19,999.09	\$21,999.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
LS Series Professional Packages			
SE LS18-8 PKG	Senator LS18-8 Professional Package	\$18,060.01	\$19,866.00
SE LS22-8 PKG	Senator LS22-8 Professional Package	\$20,170.92	\$22,188.00
SE LS30-8 PKG	Senator LS30-8 Professional Package	\$26,071.83	\$28,679.00
SE LS37-8 PKG	Senator LS37-8 Professional Package	\$28,016.38	\$30,818.00
SE LS45-8 PKG	Senator LS45-8 Professional Package	\$31,590.01	\$34,749.00
SE LS55-8 PKG	Senator LS55-8 Professional Package	\$40,505.47	\$44,556.00
SE LS75-8 PKG	Senator LS75-8 Professional Package	\$47,376.36	\$52,114.00
LSV Series Professional Packages			
SE LSV18-8 PKG	Senator LSV18-8 Professional Package	\$20,774.55	\$22,852.00
SE LSV22-8 PKG	Senator LSV22-8 Professional Package	\$23,130.92	\$25,444.00
SE LSV30-8 PKG	Senator LSV30-8 Professional Package	\$29,118.19	\$32,030.00
SE LSV37-8 PKG	Senator LSV37-8 Professional Package	\$32,312.75	\$35,544.00
SE LSV45-8 PKG	Senator LSV45-8 Professional Package	\$36,750.01	\$40,425.00
SE LSV55-8 PKG	Senator LSV55-8 Professional Package	\$45,846.37	\$50,431.00
SE LSV75-8 PKG	Senator LSV75-8 Professional Package	\$54,622.72	\$60,085.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
DS Series Professional Packages			
SE DS4-8 PKG	Senator DS4-8 Professional Package	\$10,647.28	\$11,712.00
SE DS6-8 PKG	Senator DS6-8 Professional Package	\$11,741.80	\$12,916.00
SE DS8-8 PKG	Senator DS8-8 Professional Package	\$12,098.17	\$13,308.00
SE DS11-8 PKG	Senator DS11-8 Professional Package	\$14,809.08	\$16,290.00
SE DS15-8 PKG	Senator DS15-8 Professional Package	\$16,069.09	\$17,676.00
SE DS18-8 PKG	Senator DS18-8 Professional Package	\$19,607.28	\$21,568.00
SE DS22-8 PKG	Senator DS22-8 Professional Package	\$20,051.83	\$22,057.00
SE DS30-8 PKG	Senator DS30-8 Professional Package	\$26,238.19	\$28,862.00
SE DS37-8 PKG	Senator DS37-8 Professional Package	\$27,073.66	\$29,781.00
SE DS45-8 PKG	Senator DS45-8 Professional Package	\$33,154.55	\$36,470.00
SE DS55-8 PKG	Senator DS55-8 Professional Package	\$44,402.74	\$48,843.00
SE DS55-10 PKG	Senator DS55-10 Professional Package	\$44,402.74	\$48,843.00
SE DS75-8 PKG	Senator DS75-8 Professional Package	\$56,224.54	\$61,847.00
SE DS75-10 PKG	Senator DS75-10 Professional Package	\$56,224.54	\$61,847.00
SE DS90-8 PKG	Senator DS90-8 Professional Package	\$65,667.28	\$72,234.00
SE DS90-10 PKG	Senator DS90-10 Professional Package	\$65,667.28	\$72,234.00
DSV Series Professional Packages			
SE DSV8-8 PKG	Senator DSV8-8 Professional Package	\$15,030.89	\$16,534.00
SE DSV11-8 PKG	Senator DSV11-8 Professional Package	\$18,080.90	\$19,889.00
SE DSV15-8 PKG	Senator DSV15-8 Professional Package	\$18,831.82	\$20,715.00
SE DSV18-8 PKG	Senator DSV18-8 Professional Package	\$22,922.74	\$25,215.00
SE DSV22-8 PKG	Senator DSV22-8 Professional Package	\$23,300.01	\$25,630.00
SE DSV30-8 PKG	Senator DSV30-8 Professional Package	\$31,650.01	\$34,815.00
SE DSV37-8 PKG	Senator DSV37-8 Professional Package	\$32,755.48	\$36,031.00
SE DSV45-8 PKG	Senator DSV45-8 Professional Package	\$38,851.82	\$42,737.00
SE DSV55-8-10 PKG	Senator DSV55-8-10 Professional Package	\$50,360.92	\$55,397.00
SE DSV75-8-10 PKG	Senator DSV75-8-10 Professional Package	\$64,235.45	\$70,659.00
SE DSV90-8-10 PKG	Senator DSV90-8-10 Professional Package	\$74,329.09	\$81,762.00



Compressed Air System Packages

Product Code	Description	List Price Excl. GST	List Price Incl. GST
ECO Scroll Series Ultimate Packages			
FS ES04-8B PKG	FS-Curtis ES04-8B Ultimate Package	\$14,604.54	\$16,065.00
FS ES08-8B PKG	FS-Curtis ES08-8B Ultimate Package	\$24,526.34	\$26,979.00
FS ES11-8B PKG	FS-Curtis ES11-8B Ultimate Package	\$34,911.80	\$38,403.00
FS ES15-8B PKG	FS-Curtis ES15-8B Ultimate Package	\$40,216.36	\$44,238.00

Diesel Screw Air Compressors





FAC Series Box & Trailer Type

Diesel Rotary Screw Air Compressors



FS-Curtis box type, portable diesel air compressors are designed for mounting in confined spaces such as on service trucks. They are also ideal for stationary applications. Access is only required to one side for routine maintenance. The all-steel cabinets are lockable, silenced and weatherproof. Made in Japan.


FAC-18B

FAC-18BC

FAC-23B

Free Air Delivery	1.84 m ³ /min (65 cfm)	1.84 m ³ /min (65 cfm)	2.3 m ³ /min (80 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	9.2 bar (133 psi)	9.2 bar (133 psi)	9.3 bar (135 psi)
Aftercooler	N/A (See FAC-18BC)	Air-to-Air	N/A (See FAC-23BC)
Engine	Kubota D722-K3A	Kubota D722-K3A	Kubota D902-K3A
Fuel Consumption	3.9 L/h @ 100% Load	3.9 L/h @ 100% Load	5.1 L/h @ 100% Load
Noise Level @ 7 m	67 dB(A)	67 dB(A)	66 dB(A)
Weight (Wet)	340 kg	345 kg	435 kg
Product Code	FS FAC-18B	FS FAC-18BC	FS FAC-23B


FAC-23BC

FAC-28B

FAC-28BC

Free Air Delivery	2.3 m ³ /min (80 cfm)	2.8 m ³ /min (100 cfm)	2.8 m ³ /min (100 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	9.3 bar (135 psi)	9 bar (130 psi)	9 bar (130 psi)
Aftercooler	Air-to-Air	N/A (See FAC-28BC)	Air-to-Air
Engine	Kubota D902-K3A	Kubota D1105-K3B	Kubota D1105-K3B
Fuel Consumption	5.1 L/h @ 100% Load	6.3 L/h @ 100% Load	6.3 L/h @ 100% Load
Noise Level @ 7 m	66 dB(A)	66 dB(A)	66 dB(A)
Weight (Wet)	440 kg	500 kg	510 kg
Product Code	FS FAC-23BC	FS FAC-28B	FS FAC-28BC


FAC-37B

FAC-37BC

FAC-52B

Free Air Delivery	3.7 m³/min (130 cfm)	3.7 m³/min (130 cfm)	5.2 m³/min (185 cfm)
Rated Pressure	6.9 bar (100 psi)	6.9 bar (100 psi)	7 bar (102 psi)
Maximum Pressure	9 bar (130 psi)	9 bar (130 psi)	9 bar (130 psi)
Aftercooler	N/A (See FAC-37BC)	Air-to-Air	N/A (See FAC-52BC)
Engine	Yanmar 3TNV88-BDHK	Yanmar 3TNV88-BDHK	Yanmar 4TNV88-BXDHKSR1
Fuel Consumption	7.5 L/h @ 100% Load	7.5 L/h @ 100% Load	9.0 L/h @ 100% Load
Noise Level @ 7 m	66 dB(A)	66 dB(A)	68 dB(A)
Weight (Wet)	720 kg	730 kg	855 kg
Product Code	FS FAC-37B	FS FAC-37BC	FS FAC-52B


FAC-52BC

FAC-52P WW

FAC-75B

Free Air Delivery	5.2 m³/min (185 cfm)	5.2 m³/min (185 cfm)	7.5 m³/min (265 cfm)
Rated Pressure	7 bar (102 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
Maximum Pressure	9 bar (130 psi)	9 bar (130 psi)	9 bar (130 psi)
Aftercooler	Air-to-Air	N/A (See FAC-52BC)	N/A (See FAC-75BC)
Engine	Yanmar 4TNV88-BXDHKSR1	Yanmar 4TNV88-BDHKS	Yanmar 4TNV98T-NHK
Fuel Consumption	9.0 L/h @ 100% Load	9.5 L/h @ 100% Load	15 L/h @ 100% Load
Noise Level @ 7 m	68 dB(A)	69 dB(A)	69 dB(A)
Weight (Wet)	865 kg	870 kg	1,290 kg
Product Code	FS FAC-52BC	FS FAC-52P WW	FS FAC-75B



	FAC-75BC	FAC-110B	FAC-110BC
Free Air Delivery	7.5 m ³ /min (265 cfm)	11.0 m ³ /min (390 cfm)	11.0 m ³ /min (390 cfm)
Rated Pressure	6.9 bar (100 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
Maximum Pressure	9 bar (130 psi)	8.5 bar (125 psi)	8.5 bar (125 psi)
Aftercooler	Air-to-Air	N/A (See FAC-110BC)	Air-to-Air
Engine	Yanmar 4TNV98T-NHK	Isuzu CI-4JJ1X	Isuzu CI-4JJ1X
Fuel Consumption	15 L/h @ 100% Load	20 L/h @ 100% Load	20 L/h @ 100% Load
Noise Level @ 7 m	69 dB(A)	70 dB(A)	70 dB(A)
Weight (Wet)	1,320 kg	1,870 kg	1,910 kg
Product Code	FS FAC-75BC	FS FAC-110B	FS FAC-110BC

FS-Curtis FAC Series trailer type, portable diesel air compressors are designed for ease of mobility. Choose from single or dual axle models up to 11 m³/min that can be safely towed on-road at highway speeds. The ADR compliant trailers are quality made in Australia.



Product Image
Coming Soon



Product Image
Coming Soon



Product Image
Coming Soon

	FAC-18B TRLR	FAC-18BC TRLR	FAC-23B TRLR
Free Air Delivery	1.84 m ³ /min (65 cfm)	1.84 m ³ /min (65 cfm)	2.3 m ³ /min (80 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	9.2 bar (133 psi)	9.2 bar (133 psi)	9.3 bar (135 psi)
Aftercooler	N/A (See FAC-18BC TRLR)	Air-to-Air	N/A (See FAC-23BC TRLR)
Engine	Kubota D722-K3A	Kubota D722-K3A	Kubota D902-K3A
Fuel Consumption	3.9 L/h @ 100% Load	3.9 L/h @ 100% Load	5.1 L/h @ 100% Load
Noise Level @ 7 m	67 dB(A)	67 dB(A)	66 dB(A)
Weight (Wet)	560 kg	565 kg	675 kg
Product Code	FS FAC-18B TRLR	FS FAC-18BC TRLR	FS FAC-23B TRLR



Product Image
Coming Soon



Product Image
Coming Soon



Product Image
Coming Soon

	FAC-23BC TRLR	FAC-28B TRLR	FAC-28B TRLR
Free Air Delivery	2.3 m ³ /min (80 cfm)	2.8 m ³ /min (100 cfm)	2.8 m ³ /min (100 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	9.3 bar (135 psi)	9 bar (130 psi)	9 bar (130 psi)
Aftercooler	Air-to-Air	N/A (See FAC-28BC TRLR)	Air-to-Air
Engine	Kubota D902-K3A	Kubota D1105-K3B	Kubota D1105-K3B
Fuel Consumption	5.1 L/h @ 100% Load	6.3 L/h @ 100% Load	6.3 L/h @ 100% Load
Noise Level @ 7 m	66 dB(A)	66 dB(A)	66 dB(A)
Weight (Wet)	680 kg	780 kg	790 kg
Product Code	FS FAC-23BC TRLR	FS FAC-28B TRLR	FS FAC-28BC TRLR



Product Image
Coming Soon



Product Image
Coming Soon



Product Image
Coming Soon

	FAC-37B TRLR	FAC-37BC TRLR	FAC-52B TRLR
Free Air Delivery	3.7 m³/min (130 cfm)	3.7 m³/min (130 cfm)	5.2 m³/min (185 cfm)
Rated Pressure	6.9 bar (100 psi)	6.9 bar (100 psi)	7 bar (102 psi)
Maximum Pressure	9 bar (130 psi)	9 bar (130 psi)	9 bar (130 psi)
Aftercooler	N/A (See FAC-37BC TRLR)	Air-to-Air	N/A (See FAC-52BC TRLR)
Engine	Yanmar 3TNV88-BDHK	Yanmar 3TNV88-BDHK	Yanmar 4TNV88-BXDHKSR1
Fuel Consumption	7.5 L/h @ 100% Load	7.5 L/h @ 100% Load	9.0 L/h @ 100% Load
Noise Level @ 7 m	66 dB(A)	66 dB(A)	68 dB(A)
Weight (Wet)	1,000 kg	1,010 kg	1,135 kg
Product Code	FS FAC-37B TRLR	FS FAC-37BC TRLR	FS FAC-52B TRLR



Product Image
Coming Soon



Product Image
Coming Soon

	FAC-52BC TRLR	FAC-52P TRLR	FAC-75B TRLR
Free Air Delivery	5.2 m³/min (185 cfm)	5.2 m³/min (185 cfm)	7.5 m³/min (265 cfm)
Rated Pressure	7 bar (102 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
Maximum Pressure	9 bar (130 psi)	9 bar (130 psi)	9 bar (130 psi)
Aftercooler	Air-to-Air	N/A (See FAC-52BC TRLR)	N/A (See FAC-75BC TRLR)
Engine	Yanmar 4TNV88-BXDHKSR1	Yanmar 4TNV88-BDHKS	Yanmar 4TNV98T-NHK
Fuel Consumption	9.0 L/h @ 100% Load	9.5 L/h @ 100% Load	15 L/h @ 100% Load
Noise Level @ 7 m	68 dB(A)	69 dB(A)	69 dB(A)
Weight (Wet)	1,145 kg	1,150 kg	1,610 kg
Product Code	FS FAC-52BC TRLR	FS FAC-52P TRLR	FS FAC-75B TRLR


 Product Image
 Coming Soon




	FAC-75BC TRLR	FAC-110B TRLR	FAC-110BC TRLR
Free Air Delivery	7.5 m ³ /min (265 cfm)	11.0 m ³ /min (390 cfm)	11.0 m ³ /min (390 cfm)
Rated Pressure	6.9 bar (100 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)
Maximum Pressure	9 bar (130 psi)	8.5 bar (125 psi)	8.5 bar (125 psi)
Aftercooler	Air-to-Air	N/A (See FAC-110BC TRLR)	Air-to-Air
Engine	Yanmar 4TNV98T-NHK	Isuzu CI-4JJ1X	Isuzu CI-4JJ1X
Fuel Consumption	15 L/h @ 100% Load	20 L/h @ 100% Load	20 L/h @ 100% Load
Noise Level @ 7 m	69 dB(A)	70 dB(A)	70 dB(A)
Weight (Wet)	1,640 kg	2,310 kg	2,350 kg
Product Code	FS FAC-75BC TRLR	FS FAC-110B TRLR	FS FAC-110BC TRLR

A range of optional equipment is available in Australia to customise your FS-Curtis portable diesel air compressor to meet the special requirements of certain applications such as mine site use. These locally-fitted, high quality items have been designed and tested to work reliably under the harshest conditions.




Emergency Stop

Actuation	Push to stop and lock
Release	Rotate knob clockwise
Fitment Location	External near control panel
Lockable	No
Product Code	GM FAC-ESB

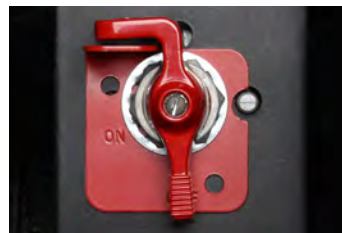

Battery Isolator

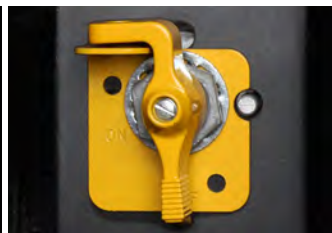

Starter Isolator

Actuation & Release	Rotate lever 1/4 turn	Rotate lever 1/4 turn
Pad Lockable	Yes, in OFF position	Yes, in OFF position
Standard Location	Inside compressor cabinet	Inside compressor cabinet
Colour	Red	Yellow
Product Code	GM FAC-BI	GM FAC-SMI

Product Code	Description	List Price Excl. GST	List Price Incl. GST
FAC Series Box Type Compressors			
FS FAC-18B	FS-Curtis FAC-18B		
FS FAC-18BC	FS-Curtis FAC-18BC		
FS FAC-23B	FS-Curtis FAC-23B		
FS FAC-23BC	FS-Curtis FAC-23BC		
FS FAC-28B	FS-Curtis FAC-28B		
FS FAC-28BC	FS-Curtis FAC-28BC		
FS FAC-37B	FS-Curtis FAC-37B		
FS FAC-37BC	FS-Curtis FAC-37BC		
FS FAC-52B	FS-Curtis FAC-52B		
FS FAC-52BC	FS-Curtis FAC-52BC		
FS FAC-52P WW	FS-Curtis FAC-52P WW		
FS FAC-75B	FS-Curtis FAC-75B		
FS FAC-75BC	FS-Curtis FAC-75BC		
FS FAC-110B	FS-Curtis FAC-110B		
FS FAC-110BC	FS-Curtis FAC-110BC		

Please contact
Glenco Air & Power
for current pricing
and availability.
Thank you.

Product Code	Description	List Price Excl. GST	List Price Incl. GST
--------------	-------------	-------------------------	-------------------------

FAC Series Box Type Compressors

FS FAC-18B TRLR	FS-Curtis FAC-18B TRLR
FS FAC-18BC TRLR	FS-Curtis FAC-18BC TRLR
FS FAC-23B TRLR	FS-Curtis FAC-23B TRLR
FS FAC-23BC TRLR	FS-Curtis FAC-23BC TRLR
FS FAC-28B TRLR	FS-Curtis FAC-28B TRLR
FS FAC-28BC TRLR	FS-Curtis FAC-28BC TRLR
FS FAC-37B TRLR	FS-Curtis FAC-37B TRLR
FS FAC-37BC TRLR	FS-Curtis FAC-37BC TRLR
FS FAC-52B TRLR	FS-Curtis FAC-52B TRLR
FS FAC-52BC TRLR	FS-Curtis FAC-52BC TRLR
FS FAC-52P TRLR	FS-Curtis FAC-52P TRLR
FS FAC-75B TRLR	FS-Curtis FAC-75B TRLR
FS FAC-75BC TRLR	FS-Curtis FAC-75BC TRLR
FS FAC-110B TRLR	FS-Curtis FAC-110B TRLR
FS FAC-110BC TRLR	FS-Curtis FAC-110BC TRLR

Please contact
Glenco Air & Power
for current pricing
and availability.
Thank you.

FAC Series Options

GM FAC-ESB	Emergency Stop Button
GM FAC-BI	Battery Isolator
GM FAC-SMI	Starter Motor Isolator

Compressed Air Storage & Treatment



Express Tank™



Compressed Air Storage & Treatment



THB

Express Tank vertical air receivers are designed and manufactured to the highest quality standards for safe and reliable use in industrial compressed air systems. This off-the-shelf range includes the most popular sizes from 60 to 5,150 litres that are finish-painted and packed ready for dispatch to the job site.

**V60-14-GB****V150-11-AS****V150-14-GB****V300-11-AS**

Tank Volume	60 Litres	150 Litres	150 Litres	300 Litres
Design Pressure	1,400 kPa (203 psi)	1,100 kPa (160 psi)	1,400 kPa (203 psi)	1,100 kPa (160 psi)
Inlet & Outlet Ports	4 × 3/4 inch BSP	4 × 1-1/2 inch BSP	4 × 1-1/2 inch BSP	4 × 1-1/2 inch BSP
Diameter	300 mm	390 mm	400 mm	490 mm
Shell Length	730 mm	998 mm	1,050 mm	1,340 mm
Overall Height	1,195 mm	1,500 mm	1,603 mm	1,900 mm
Weight	35 kg	53 kg	66 kg	122 kg
Optional Extra	Accessory Kit	Accessory Kit	Accessory Kit	Accessory Kit
Product Code	EU-V60-14-GB	EU-V150-11-AS	EU-V150-14-GB	EU-V300-11-AS

**V310-14-GB****V500-11-AS****V570-14-GB****V800-11-AS**

Tank Volume	310 Litres	500 Litres	570 Litres	800 Litres
Design Pressure	1,400 kPa (203 psi)	1,100 kPa (160 psi)	1,400 kPa (203 psi)	1,100 kPa (160 psi)
Inlet & Outlet Ports	4 × 1-1/2 inch BSP	4 × 2 inch BSP	4 × 2 inch BSP	4 × 2 inch BSP
Diameter	500 mm	590 mm	650 mm	700 mm
Shell Length	1,380 mm	1,440 mm	1,455 mm	1,800 mm
Overall Height	1,994 mm	2,190 mm	2,144 mm	2,600 mm
Weight	127 kg	161 kg	188 kg	280 kg
Optional Extra	Accessory Kit	Accessory Kit	Accessory Kit	Accessory Kit
Product Code	EU-V310-14-GB	EU-V500-11-AS	EU-V570-14-GB	EU-V800-11-AS

**V800-14-GB****V1000-11-AS****V1200-11-GB****V1200-14-GB**

Tank Volume	800 Litres	1,000 Litre	1,200 Litres	1,200 Litres
Design Pressure	1,400 kPa (203 psi)	1,100 kPa (160 psi)	1,100 kPa (160 psi)	1,400 kPa (203 psi)
Inlet & Outlet Ports	4 x 2 inch BSP	4 x 2 inch BSP	4 x 2 inch BSP	4 x 2 inch BSP
Diameter	750 mm	800 mm	950 mm	950 mm
Shell Length	1,470 mm	1,670 mm	1,340 mm	1,340 mm
Overall Height	2,220 mm	2,525 mm	2,181 mm	2,181 mm
Weight	228 kg	319 kg	294 kg	349 kg
Optional Extra	Accessory Kit	Accessory Kit	Accessory Kit	Accessory Kit
Product Code	EU-V800-14-GB	EU-V1000-11-AS	EU-V1200-11-GB	EU-V1200-14-GB

**V2000-11-AS****V2400-14-GB****V5150-14-GB**

Tank Volume	2,000 Litres	2,400 Litres	5,150 Litres
Design Pressure	1,100 kPa (160 psi)	1,400 kPa (203 psi)	1,400 kPa (203 psi)
Inlet & Outlet Ports	2 x NPS 3 Flange	4 x NPS 3 Flange	4 x NPS 4 Flange
Diameter	1,100 mm	1,100 mm	1,450 mm
Shell Length	1,665 mm	2,100 mm	2,580 mm
Overall Height	2,664 mm	3,114 mm	3,720 mm
Weight	657 kg	747 kg	1,561 kg
Optional Extra	Accessory Kit	Accessory Kit	Accessory Kit
Product Code	EU-V2000-11-AS	EU V2400-14-GB	EU V5150-14-GB

WHS regulations stipulate that each air receiver must be fitted with a safety valve, pressure gauge and drain valve. These items can be purchased in a model-specific accessory kit for each of the Express Tank vertical air receivers.


V60-14-GB-K
V150-11-AS-K
V150-14-GB-K
V300-11-AS-K

Safety Valve Pressure	1,400 kPa (203 psi)	1,100 kPa (159 psi)	1,400 kPa (203 psi)	1,100 kPa (159 psi)
Safety Valve Flowrate	176 cfm (4.98 m³/min))	293 cfm (8.30 m³/min)	368 cfm (10.4 m³/min)	293 cfm (8.30 m³/min)
Pressure Gauge Scale	0 - 2,500 kPa	0 - 1,600 kPa	0 - 2,500 kPa	0 - 1,600 kPa
Drain Type	Manual Ball Valve	Manual Ball Valve	Manual Ball Valve	Manual Ball Valve
Product Code	GM EU-V60-14-GB-K	GM EU-V150-11-AS-K	GM EU-V150-14-GB-K	GM EU-V300-11-AS-K


V310-14-GB-K
V500-11-AS-K
V500-11-AS-ADK
V570-14-GB-K

Safety Valve Pressure	1,400 kPa (203 psi)	1,100 kPa (159 psi)	1,100 kPa (159 psi)	1,400 kPa (203 psi)
Safety Valve Flowrate	368 cfm (10.4 m³/min)	293 cfm (8.30 m³/min)	293 cfm (8.30 m³/min)	368 cfm (10.4 m³/min)
Pressure Gauge Scale	0 - 2,500 kPa	0 - 1,600 kPa	0 - 1,600 kPa	0 - 2,500 kPa
Drain Type	Manual Ball Valve	Manual Ball Valve	Auto-Float Valve	Manual Ball Valve
Product Code	GM EU-V310-14-GB-K	GM EU-V500-11-AS-K	GM EU-V500-11-AS-ADK	GM EU-V570-14-GB-K


V800-11-AS-K
V800-11-AS-ADK
V800-14-GB-K
V1000-11-AS-K

Safety Valve Pressure	1,100 kPa (159 psi)	1,100 kPa (159 psi)	1,400 kPa (203 psi)	1,100 kPa (159 psi)
Safety Valve Flowrate	293 cfm (8.30 m³/min)	293 cfm (8.30 m³/min)	368 cfm (10.4 m³/min)	635 cfm (18.0 m³/min)
Pressure Gauge Scale	0 - 1,600 kPa	0 - 1,600 kPa	0 - 2,500 kPa	0 - 1,600 kPa
Drain Type	Manual Ball Valve	Auto-Float Valve	Manual Ball Valve	Manual Ball Valve
Product Code	GM EU-V800-11-AS-K	GM EU-V800-11-AS-ADK	GM EU-V800-14-GB-K	GM EU-V1000-11-AS-K


V1000-11-AS-ADK
V1200-11-GB-K
V1200-11-GB-ADK
V1200-14-GB-K

Safety Valve Pressure	1,100 kPa (159 psi)	1,100 kPa (159 psi)	1,100 kPa (159 psi)	1,390 kPa (201 psi)
Safety Valve Flowrate	635 cfm (18.0 m³/min)	635 cfm (18.0 m³/min)	635 cfm (18.0 m³/min)	789 cfm (22.3 m³/min)
Pressure Gauge Scale	0 - 1,600 kPa	0 - 1,600 kPa	0 - 1,600 kPa	0 - 2,500 kPa
Drain Type	Auto-Float Valve	Manual Ball Valve	Manual Ball Valve	Auto-Float Valve
Product Code	GM EU-V1000-11-AS-ADK	GM EU-V1200-11-GB-K	GM EU-V1200-11-GB-ADK	GM EU-V1200-14-GB-K


V2000-11-AS-K
V2000-11-AS-ADK
V2400-14-GB-K
V5150-14-GB-K

Safety Valve Pressure	1,100 kPa (159 psi)	1,100 kPa (159 psi)	1,400 kPa (203 psi)	1,400 kPa (203 psi)
Safety Valve Flowrate	1,351 cfm (38.2 m³/min)	1,351 cfm (38.2 m³/min)	1,696 cfm (48.0 m³/min)	1,696 cfm (48.0 m³/min)
Pressure Gauge Scale	0 - 1,600 kPa	0 - 1,600 kPa	0 - 2,500 kPa	0 - 2,500 kPa
Drain Type	Auto-Float Valve	Manual Ball Valve	Manual Ball Valve	Auto-Float Valve
Product Code	GM EU-V2000-11-AS-K	GM EU-V2000-11-AS-ADK	GM EU-V2400-14-GB-K	GM EU-V5150-14-GB-K

A selection of genuine accessories and spare parts is available for the recently superseded range of Fusheng vertical air receivers. These handy items include gaskets, O-rings, threaded plugs and blank flanges to suit.


3 inch Gasket

4 inch Gasket

Headhole Gasket

Nominal Size	DN80	DN100	Outside Dimensions	360 mm x 260 mm
Flange Table	E per AS 2129-2000	E per AS 2129-2000	Material	Aramid and Nitrile Rubber
Material	Non-Asbestos	Non-Asbestos	Asbestos Free	Yes
Suit Vert. Receiver	2,400 Litres	5,000 Litres	Suit Vert. Receiver	1,240, 2,400 & 5,000 L
Product Code	FS NA-1005E-3	FS NA-1005E-2	Product Code	FS NA-1005E



1-1/2 inch O-Ring

2 inch O-Ring

Suit Plug	FS 1.5 PLUG	FS 2 PLUG
Material	Nitrile Rubber	Nitrile Rubber
Product Code	FS 1.5 ORING	FS 2 ORING


1-1/2 inch Plug
2 inch Plug

Male Thread	1-1/2 inch BSPP	2 inch BSPP
Material	Cast Iron	Cast Iron
Required O-Ring	FS 1.5 ORING	FS 2 ORING
Suit Vert. Receiver	150 & 330 Litres	530, 820 & 1,240 Litres
Product Code	FS 1.5 PLUG	FS 2 PLUG

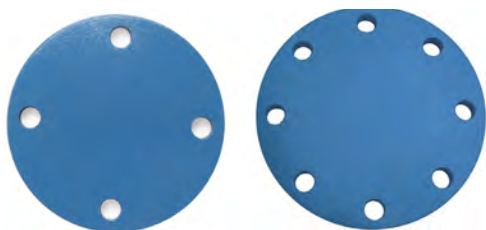
3 inch Blank Flange
4 inch Blank Flange

Nominal Size	DN80	DN100
Flange Table	E per AS 2129-2000	E per AS 2129-2000
Material	Steel	Steel
Suit Vert. Receiver	2,400 Litres	5,000 Litres
Product Code	FS 9014513-29224	FS 9014513-29232

The Fusheng FR Series is a premium quality range of high efficiency refrigerant dryers offering effective moisture removal with maximum reliability. All models feature a stainless steel heat exchanger and auto capacity control system. They are performance rated for the Australian climate.



	FR005A	FR010A	FR020A	FR030A
Airflow Capacity	0.6 m³/min (21.2 cfm)	1.2 m³/min (42.4 cfm)	2.4 m³/min (84.8 cfm)	4.4 m³/min (155 cfm)
Rated Air Pressure	700 kPa (102 psi)	700 kPa (102 psi)	700 kPa (102 psi)	700 kPa (102 psi)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Inlet Air Temp.	35°C Nom. / 50°C Max.	35°C Nom. / 50°C Max.	35°C Nom. / 50°C Max.	35°C Nom. / 50°C Max.
Ambient Temp.	32°C Nom. / 40°C Max.	32°C Nom. / 40°C Max.	32°C Nom. / 40°C Max.	32°C Nom. / 40°C Max.
Dew Point	2°C Nom. / 10°C Max.	2°C Nom. / 10°C Max.	2°C Nom. / 10°C Max.	23°C Nom. / 10°C Max.
Inlet & Outlet Size	1/2 inch BSP	3/4 inch BSP	1 inch BSP	1 inch BSP
Electricity Supply	240 Volts, 10 Amps	240 Volts, 10 Amps	240 Volts, 10 Amps	240 Volts, 10 Amps
Product Code	FS FR005A	FS FR010A	FS FR020A	FS FR030A



	FR050A	FR075A	FR100A	FR150A
Airflow Capacity	7.0 m³/min (247 cfm)	11.0 m³/min (388 cfm)	14.0 m³/min (494 cfm)	23.5 m³/min (830 cfm)
Rated Air Pressure	700 kPa (102 psi)	700 kPa (102 psi)	700 kPa (102 psi)	700 kPa (102 psi)
Maximum Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)	1,000 kPa (145 psi)
Inlet Air Temp.	35°C Nom. / 50°C Max.	35°C Nom. / 50°C Max.	35°C Nom. / 50°C Max.	35°C Nom. / 50°C Max.
Ambient Temp.	32°C Nom. / 40°C Max.	32°C Nom. / 40°C Max.	32°C Nom. / 40°C Max.	32°C Nom. / 40°C Max.
Dew Point	2°C Nom. / 10°C Max.	2°C Nom. / 10°C Max.	2°C Nom. / 10°C Max.	2°C Nom. / 10°C Max.
Inlet & Outlet Size	1-1/2 inch BSP	1-1/2 inch BSP	2 inch BSP	2-1/2 inch BSP
Electricity Supply	240 Volts, 10 Amps	240 Volts, 10 Amps	415 Volts, 4.7 Amps	415 Volts, 7.0 Amps
Product Code	FS FR050A	FS FR075A	FS FR100A	FS FR150A

Fusheng T Series compressed air filters are engineered to provide the necessary air quality for pneumatic plant, equipment and processes. Select from four different filter grades of particulate and oil removal. A filter condition gauge and auto-drain are standard on all models.



	T5P	T5U	T5H	T5C
Airflow Capacity	0.66 m ³ /min (23 cfm)	0.66 m ³ /min (23 cfm)	0.66 m ³ /min (23 cfm)	0.66 m ³ /min (23 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m ³	0.01 mg/m ³	0.003 mg/m ³
Inlet & Outlet Ports	1/2 inch BSP	1/2 inch BSP	1/2 inch BSP	1/2 inch BSP
Product Code	FS T5P	FS T5U	FS T5H	FS T5C



	T10P	T10U	T10H	T10C
Airflow Capacity	1.32 m ³ /min (47 cfm)	1.32 m ³ /min (47 cfm)	1.32 m ³ /min (47 cfm)	1.32 m ³ /min (47 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m ³	0.01 mg/m ³	0.003 mg/m ³
Inlet & Outlet Ports	1/2 inch BSP	1/2 inch BSP	1/2 inch BSP	1/2 inch BSP
Product Code	FS T10P	FS T10U	FS T10H	FS T10C



	T15P	T15U	T15H	T15C
Airflow Capacity	1.98 m³/min (70 cfm)	1.98 m³/min (70 cfm)	1.98 m³/min (70 cfm)	1.98 m³/min (70 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP	3/4 inch BSP
Product Code	FS T15P	FS T15U	FS T15H	FS T15C



	T20P	T20U	T20H	T20C
Airflow Capacity	3.30 m³/min (116 cfm)	3.30 m³/min (116 cfm)	3.30 m³/min (116 cfm)	3.30 m³/min (116 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	1 inch BSP	1 inch BSP	1 inch BSP	1 inch BSP
Product Code	FS T20P	FS T20U	FS T20H	FS T20C



	T40P	T40U	T40H	T40C
Airflow Capacity	5.70 m³/min (201 cfm)	5.70 m³/min (201 cfm)	5.70 m³/min (201 cfm)	5.70 m³/min (201 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	1 1/2 inch BSP	1 1/2 inch BSP	1 1/2 inch BSP	1 1/2 inch BSP
Product Code	FS T40P	FS T40U	FS T40H	FS T40C



	T60P	T60U	T60H	T60C
Airflow Capacity	9.00 m³/min (318 cfm)	9.00 m³/min (318 cfm)	9.00 m³/min (318 cfm)	9.00 m³/min (318 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	1 1/2 inch BSP	1 1/2 inch BSP	1 1/2 inch BSP	1 1/2 inch BSP
Product Code	FS T60P	FS T60U	FS T60H	FS T60C



	T75P	T75U	T75H	T75C
Airflow Capacity	13.32 m³/min (470 cfm)	13.32 m³/min (470 cfm)	13.32 m³/min (470 cfm)	13.32 m³/min (470 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	1 1/2 inch BSP	1 1/2 inch BSP	1 1/2 inch BSP	1 1/2 inch BSP
Product Code	FS T75P	FS T75U	FS T75H	FS T75C



	T125P	T125U	T125H	T125C
Airflow Capacity	17.46 m³/min (616 cfm)	17.46 m³/min (616 cfm)	17.46 m³/min (616 cfm)	17.46 m³/min (616 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	2 inch BSP	2 inch BSP	2 inch BSP	2 inch BSP
Product Code	FS T125P	FS T125U	FS T125H	FS T125C



	T175P	T175U	T175H	T175C
Airflow Capacity	26.16 m³/min (923 cfm)	26.16 m³/min (923 cfm)	26.16 m³/min (923 cfm)	26.16 m³/min (923 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	2 1/2 inch BSP	2 1/2 inch BSP	2 1/2 inch BSP	2 1/2 inch BSP
Product Code	FS T175P	FS T175U	FS T175H	FS T175C



	T250P	T250U	T250H	T250C
Airflow Capacity	37.50 m³/min (1,324 cfm)	37.50 m³/min (1,324 cfm)	37.50 m³/min (1,324 cfm)	37.50 m³/min (1,324 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	3 inch BSP	3 inch BSP	3 inch BSP	3 inch BSP
Product Code	FS T250P	FS T250U	FS T250H	FS T250C



	T300P	T300U	T300H	T300C
Airflow Capacity	46.62 m³/min (1,645 cfm)	46.62 m³/min (1,645 cfm)	46.62 m³/min (1,645 cfm)	46.62 m³/min (1,645 cfm)
Rated Pressure	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)	7 bar (102 psi)
Maximum Pressure	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)	16 bar (232 psi)
Filter Grade	P	U	H	C
Filter Type	Coarse Particulate	Fine Coalescing	Ultrafine Coalescing	Activated Carbon Adsorption
Filtration	3 micron	1 micron	0.01 micron	N/A
Oil Removal	N/A	0.1 mg/m³	0.01 mg/m³	0.003 mg/m³
Inlet & Outlet Ports	3 inch BSP	3 inch BSP	3 inch BSP	3 inch BSP
Product Code	FS T300P	FS T300U	FS T300H	FS T300C


T5-15MK
T20-75MK

Function	Filter Mounting Kit	Filter Mounting Kit
Suit Fusheng Filters	T5, T10 & T15	T20, T40, T60 & T75
Material	Steel, Painted	Steel, Painted
Masonry Anchors	5/16 x 2-5/8 inch (Qty 2)	3/8 x 3 inch (Qty 2)
Product Code	FS T5-15MK	FS T20-75MK


IAD516A

Function	Internal Auto Drain
Suit Fusheng Filters	Models T5 to T75
Maximum Pressure	16 bar (232 psi)
Outlet Port	1/8 inch BSPF or 6 mm Tube
Product Code	FS IAD516A


EAD416-169B

Function	External Auto Drain
Suit Fusheng Filters	Models T125 to T300
Maximum Pressure	16 bar (232 psi)
Outlet Port	1/2 inch BSPF
Product Code	FS EAD416-169B


DP12

Function	Filter Condition Gauge
Suit Fusheng Filters	All T Series Models
Diff. Press. Range	0-2 bar (0-29 psi)
Dial Size	50 mm Diameter
Product Code	FS DP12

Filter-regulators provide basic 5 micron particulate removal and adjustable pressure reduction in a compact single unit, typically used in conjunction with portable reciprocating compressors. Float type auto-drains discharge condensed water reliably powered only by compressed air.

THB



FR502



FR502A



F5002A-D50

Function	Filter-Regulator	Filter-Regulator	Function	Filt-Reg Drain Conversion
Airflow Capacity	2.2 m³/min (78 cfm)	2.2 m³/min (78 cfm)	Max. Inlet Pressure	1,000 kPa (145 psi)
Max. Inlet Pressure	1,000 kPa (145 psi)	1,000 kPa (145 psi)	Drain	Automatic, Normally Open
Outlet Pressure	50-850 kPa (7-123 psi)	50-850 kPa (7-123 psi)	Application	Convert FR502 to FR502A
Filter Grade	5 micron	5 micron	Product Code	TH F5002A-D50
Pressure Gauge	0-11 kg/cm² (0-160 psi)	0-11 kg/cm² (0-160 psi)		
Drain	Manual, Normally Closed	Automatic, Normally Open		
Inlet & Outlet Ports	1/4 inch BSP	1/4 inch BSP		
Product Code	TH FR502	TH FR502A		

THB



FR706



D704A

Function	Filter-Regulator	Function	Automatic Drain
Airflow Capacity	4 m³/min (141 cfm)	Actuation	Float Valve
Max. Inlet Pressure	1,550 kPa (225 psi)	Inlet Port	1/2 inch BSP
Outlet Pressure	50-1,500 kPa (7-215 psi)	Outlet Port	1/8 inch BSP
Filter Grade	5 micron	Max. Inlet Pressure	1,200 kPa (174 psi)
Pressure Gauge	0-16 bar	Overall Height	171 mm
Drain	Manual, Normally Closed	Product Code	TH D704A
Inlet & Outlet Ports	3/4 inch BSP		
Product Code	TH FR706		



FR502/AW30 KIT

Function	Filt-Reg Installation Kit
Suit THB Filt-Reg	FR502 & FR502A
Suit SMC Filt-Reg	AW30-02BG
Suit Airmac Models	240 Volt, V16P, T20P & T20D
Product Code	GM FR502-AW30 KIT

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Express Tank Vertical Air Receivers			
EU V60-14-GB	Express Tank V60-14-GB	\$693.64	\$763.00
EU V150-11-AS	Express Tank V150-11-AS	\$1,037.27	\$1,141.00
EU V150-14-GB	Express Tank V150-14-GB	\$1,293.64	\$1,423.00
EU V300-11-AS	Express Tank V300-11-AS	\$1,520.91	\$1,673.00
EU V310-14-GB	Express Tank V310-14-GB	\$1,860.91	\$2,047.00
EU V500-11-AS	Express Tank V500-11-AS	\$2,622.73	\$2,885.00
EU V570-14-GB	Express Tank V570-14-GB	\$2,989.09	\$3,288.00
EU V800-11-AS	Express Tank V800-11-AS	\$3,674.55	\$4,042.00
EU V800-14-GB	Express Tank V800-14-GB	\$4,003.64	\$4,404.00
EU V1000-11-AS	Express Tank V1000-11-AS	\$4,177.27	\$4,595.00
EU V1200-11-GB	Express Tank V1200-11-GB	\$5,150.91	\$5,666.00
EU V1200-14-GB	Express Tank V1200-14-GB	\$6,202.73	\$6,823.00
EU V2000-11-AS	Express Tank V2000-11-AS	\$9,540.91	\$10,495.00
EU V2400-14-GB	Express Tank V2400-14-GB	\$11,449.09	\$12,594.00
EU V5150-14-GB	Express Tank V5150-14-GB	\$22,903.64	\$25,194.00
Express Tank Vertical Air Receiver Accessories			
GM EU-V60-14-GB-K	EU-V60-14-GB Manual Drain Accessory Kit	\$56.36	\$62.00
GM EU-V150-11-AS-K	EU-V150-11-AS Manual Drain Accessory Kit	\$120.91	\$133.00
GM EU-V150-14-GB-K	EU V150-14-GB Manual Drain Accessory Kit	\$118.18	\$130.00
GM EU-V300-11-AS-K	EU-V300-11-AS Manual Drain Accessory Kit	\$120.91	\$133.00
GM EU-V310-14-GB-K	EU V310-14-GB Manual Drain Accessory Kit	\$118.18	\$130.00
GM EU-V500-11-AS-K	EU-V500-11-AS Manual Drain Accessory Kit	\$120.91	\$133.00
GM EU-V500-11-AS-ADK	EU-V500-11-AS Auto-Drain Accessory Kit	\$232.73	\$256.00
GM EU-V570-14-GB-K	EU V570-14-GB Manual Drain Accessory Kit	\$118.18	\$130.00
GM EU-V800-11-AS-K	EU-V800-11-AS Manual Drain Accessory Kit	\$131.82	\$145.00
GM EU-V800-11-AS-ADK	EU-V800-11-AS Auto-Drain Accessory Kit	\$232.73	\$256.00
GM EU-V800-14-GB-K	EU-V800-14-GB Manual Drain Accessory Kit	\$128.18	\$141.00
GM EU-V1000-11-AS-K	EU-V1000-11-AS Manual Drain Accessory Kit	\$167.27	\$184.00
GM EU-V1000-11-AS-ADK	EU-V1000-11-AS Auto-Drain Accessory Kit	\$280.00	\$308.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Express Tank Vertical Air Receiver Accessories			
GM EU-V1200-11-GB-K	EU-V1200-11-GB Manual Drain Accessory Kit	\$168.18	\$185.00
GM EU-V1200-11-GB-ADK	EU-V1200-11-GB Auto-Drain Accessory Kit	\$300.91	\$331.00
GM EU-V1200-14-GB-K	EU-V1200-14-GB Manual Drain Accessory Kit	\$168.18	\$185.00
GM EU-V2000-11-AS-K	EU-V2000-11-AS Manual Drain Accessory Kit	\$260.91	\$287.00
GM EU-V2000-11-AS-ADK	EU-V2000-11-AS Auto-Drain Accessory Kit	\$427.27	\$470.00
GM EU-V2400-14-GB-K	EU-V2400-14-GB Manual Drain Accessory Kit	\$309.09	\$340.00
GM EU-V5150-14-GB-K	EU-V5150-14-GB Manual Drain Accessory Kit	\$309.09	\$340.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Fusheng Vertical Air Receiver Accessories			
FS NA-1005E-3	3 inch Gasket	\$40.82	\$44.90
FS NA-1005E-2	4 inch Gasket	\$48.64	\$53.50
FS NA-1005E	Inspection Headhole Cover Gasket	\$70.00	\$77.00
FS 1.5 ORING	1-1/2 inch Plug O-Ring	\$6.45	\$7.10
FS 2 ORING	2 inch Plug O-Ring	\$8.36	\$9.20
FS 1.5 PLUG	1-1/2 inch Plug	\$63.27	\$69.60
FS 2 PLUG	2 inch Plug	\$81.73	\$89.90
FS 9014513-29224	3 inch Blank Flange	\$63.27	\$69.60
FS 9014513-29232	4 inch Blank Flange	\$101.18	\$111.30
Refrigerant Compressed Air Dryers			
FS FR005A	Fusheng FR005A	\$2,123.64	\$2,336.00
FS FR010A	Fusheng FR010A	\$2,816.36	\$3,098.00
FS FR020A	Fusheng FR020A	\$3,746.36	\$4,121.00
FS FR030A	Fusheng FR030A	\$4,493.64	\$4,943.00
FS FR050A	Fusheng FR050A	\$6,733.64	\$7,407.00
FS FR075A	Fusheng FR075A	\$9,027.27	\$9,930.00
FS FR100A	Fusheng FR100A	\$12,150.00	\$13,365.00
FS FR150A	Fusheng FR150A	\$16,770.00	\$18,447.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Compressed Air Filters			
FS T5P	Fusheng T5P Compressed Air Filter	\$413.64	\$455.00
FS T5U	Fusheng T5U Compressed Air Filter	\$413.64	\$455.00
FS T5H	Fusheng T5H Compressed Air Filter	\$413.64	\$455.00
FS T5C	Fusheng T5C Compressed Air Filter	\$413.64	\$455.00
FS T10P	Fusheng T10P Compressed Air Filter	\$518.18	\$570.00
FS T10U	Fusheng T10U Compressed Air Filter	\$518.18	\$570.00
FS T10H	Fusheng T10H Compressed Air Filter	\$518.18	\$570.00
FS T10C	Fusheng T10C Compressed Air Filter	\$518.18	\$570.00
FS T15P	Fusheng T15P Compressed Air Filter	\$560.00	\$616.00
FS T15U	Fusheng T15U Compressed Air Filter	\$560.00	\$616.00
FS T15H	Fusheng T15H Compressed Air Filter	\$560.00	\$616.00
FS T15C	Fusheng T15C Compressed Air Filter	\$560.00	\$616.00
FS T20P	Fusheng T20P Compressed Air Filter	\$846.36	\$931.00
FS T20U	Fusheng T20U Compressed Air Filter	\$846.36	\$931.00
FS T20H	Fusheng T20H Compressed Air Filter	\$846.36	\$931.00
FS T20C	Fusheng T20C Compressed Air Filter	\$846.36	\$931.00
FS T40P	Fusheng T40P Compressed Air Filter	\$957.27	\$1,053.00
FS T40U	Fusheng T40U Compressed Air Filter	\$957.27	\$1,053.00
FS T40H	Fusheng T40H Compressed Air Filter	\$957.27	\$1,053.00
FS T40C	Fusheng T40C Compressed Air Filter	\$957.27	\$1,053.00
FS T60P	Fusheng T60P Compressed Air Filter	\$1,081.82	\$1,190.00
FS T60U	Fusheng T60U Compressed Air Filter	\$1,081.82	\$1,190.00
FS T60H	Fusheng T60H Compressed Air Filter	\$1,081.82	\$1,190.00
FS T60C	Fusheng T60C Compressed Air Filter	\$1,081.82	\$1,190.00
FS T75P	Fusheng T75P Compressed Air Filter	\$1,433.64	\$1,577.00
FS T75U	Fusheng T75U Compressed Air Filter	\$1,433.64	\$1,577.00
FS T75H	Fusheng T75H Compressed Air Filter	\$1,433.64	\$1,577.00
FS T75C	Fusheng T75C Compressed Air Filter	\$1,433.64	\$1,577.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Compressed Air Filters			
FS T125P	Fusheng T125P Compressed Air Filter	\$1,736.36	\$1,910.00
FS T125U	Fusheng T125U Compressed Air Filter	\$1,736.36	\$1,910.00
FS T125H	Fusheng T125H Compressed Air Filter	\$1,736.36	\$1,910.00
FS T125C	Fusheng T125C Compressed Air Filter	\$1,736.36	\$1,910.00
FS T175P	Fusheng T175P Compressed Air Filter	\$2,830.91	\$3,114.00
FS T175U	Fusheng T175U Compressed Air Filter	\$2,830.91	\$3,114.00
FS T175H	Fusheng T175H Compressed Air Filter	\$2,830.91	\$3,114.00
FS T175C	Fusheng T175C Compressed Air Filter	\$2,830.91	\$3,114.00
FS T250P	Fusheng T250P Compressed Air Filter	\$4,404.55	\$4,845.00
FS T250U	Fusheng T250U Compressed Air Filter	\$4,404.55	\$4,845.00
FS T250H	Fusheng T250H Compressed Air Filter	\$4,404.55	\$4,845.00
FS T250C	Fusheng T250C Compressed Air Filter	\$4,404.55	\$4,845.00
FS T300P	Fusheng T300P Compressed Air Filter	\$5,035.45	\$5,539.00
FS T300U	Fusheng T300U Compressed Air Filter	\$5,035.45	\$5,539.00
FS T300H	Fusheng T300H Compressed Air Filter	\$5,035.45	\$5,539.00
FS T300C	Fusheng T300C Compressed Air Filter	\$5,035.45	\$5,539.00
Compressed Air Filter Accessories			
FS T5-15MK	Fusheng T5-15 Filter Mounting Kit	\$85.45	\$94.00
FS T20-75MK	Fusheng T20-75 Filter Mounting Kit	\$93.64	\$103.00
FS IAD516A	Fusheng IAD516A Internal Auto Drain	\$155.45	\$171.00
FS EAD416-169B	Fusheng EAD416-169B External Auto Drain	\$307.27	\$338.00
FS DP12	Fusheng DP12 Differential Pressure Gauge	\$166.36	\$183.00

Product Code	Description	List Price Excl. GST	List Price Incl. GST
Filter-Regulators and Auto-Drains			
TH FR502	THB FR502 Filter-Regulator with Manual Drain	\$67.27	\$74.00
TH FR502A	THB FR502 Filter-Regulator with Auto-Drain	\$136.36	\$150.00
TH F5002A-D50	THB FR502 Filter Bowl with Auto-Drain	\$63.64	\$70.00
TH FR706	THB FR706 Filter-Regulator with Manual Drain	\$152.73	\$168.00
TH D704A	THB D704A Automatic Drain	\$164.55	\$181.00

Spare Parts



Spare Parts

- Please refer to Glenco's website at www.glencoairpower.com.au for up-to-date spare parts information.

Notes



Shipping Dimensions and Weights

- Please refer to Glenco's website at www.glencoairpower.com.au for up-to-date shipping dimensions and weights.

