

# LENTO

## OIL-FREE SCREW COMPRESSOR







# QUALITY AND INNOVATIONS MADE IN GERMANY.

## Decades of experience and excellent performance

ALMiG is one of the leading compressed air technology system providers and has decades of experience delivering premium products in the compressed air sector. Companies all around the world trust in our customer focused solutions, our quality, innovation and flexibility. Our advanced compressor technologies combine excellence with the quietest possible running performance, optimal energy efficiency and particularly careful conservation of resources.

## Ongoing development and comprehensive industry knowledge

Constant research and development form the essential foundation for the efficiency of every system manufactured by ALMiG. Only these constant enhancements and improvements enable us to react quickly and flexibly to individual customer wishes. This attitude is complemented by a comprehensive understanding of the sector: we understand the challenges that our customers are faced with and the requirements that arise as a consequence. ALMiG offers effective solutions for a wide range of applications – from small craft workshops to medium-sized companies to big industry.

## Complete service and maximum availability

The highest quality technological solutions deserve an equally high level of service. The ALMiG service provisions offer our customers a complete service programme: from providing comprehensive advice to ensuring availability, improving cost-effectiveness and developing energy-saving potential. As an expert partner, ALMiG offers its customers advice and support on all issues. Our goal is to contribute to your economic success with our service offerings.

### **ALMiG: Compressor Systems Made in Germany**

Piston compressors

Screw compressors

Turbo compressors

Scroll compressors

Special installations

Controllers

Compressed air treatment

Services

# LENTO

## Oil-free compressed air of outstanding quality

Our LENTO series generates 100% oil-free compressed air for all applications, where products of the highest quality are produced. Given that only water, the most natural of all raw materials, is used in the compression process, LENTO delivers maximum compressed air quality for highly sensitive areas e. g. the pharmaceutical, foodstuffs, electrical engineering and medical industries.

The speed-controlled direct drive of the LENTO series delivers maximum cost-effectiveness by precisely matching the volume flow to the respective compressed air requirement. The integrated refrigeration dryer ensures a low pressure dew point. Therefore, under certain circumstances, the customer doesn't need a separate refrigeration dryer. This avoids costs for the fresh water supply and water processing and minimises service and maintenance costs compared with other oil-free compression systems.

### Clean and ecological solution:

- Clean, environmentally friendly oil-free compressed air: ISO class 0, certified in accordance with DIN ISO 8573-1:2010
- Dust particles that are drawn in are washed out by the water
- Clean condensate – pure water – can be discharged directly into the sewer system
- Very low temperatures during compression thanks to excellent heat transfer via the water. Reduced amounts of energy are therefore used to generate the compressed air

### Application

100% oil-free compressed air for industrial use (pharmaceutical, food, chemical, etc.)

### Power output

15 - 110 kW

Volume flow acc. to ISO 1217  
(Annex C-2009)

0.73 - 20.01 m<sup>3</sup>/min

### Operating pressure

5 - 12 bar

### Cooling

Water-cooled (standard)

Air-cooled (option)

Only water-cooled available as of LENTO 76

### Drive

Direct and speed-controlled

### Motor

Energy efficiency class IE 4;  
IP 55 protection, protection class F



- + 100% oil-free compressed air generation
- + Volume flow can be adapted exactly to meet compressed air requirements
- + No switching cycles or expensive idle times
- + Energy-saving soft start without current peaks
- + Operating pressure can be freely selected between  $p_{\min}$  –  $p_{\max}$  in 0.1 bar/1.5 psig increments
- + The reduction in pressure can save money



**SCD direct drive**

Zero-loss power transfer

**Compressor**

Single-stage, water-injected; very low compression temperatures of <math><60^{\circ}\text{C}</math>, close to isothermic, economical compression

**SCD motor**

Highly efficient drive motor, IP 55 protection class ISO F; compact, powerful, reliable

**Air Control**

Smart controller that monitors, visualises and documents


**Stainless steel piping**

**Integrated refrigeration dryer**

Permanent generation and exchange of the required coolant, optimum biological and chemical water quality, for dry compressed air at the compressed air outlet

**SCD frequency converter**

The integrated power pack, according to EMC guidelines

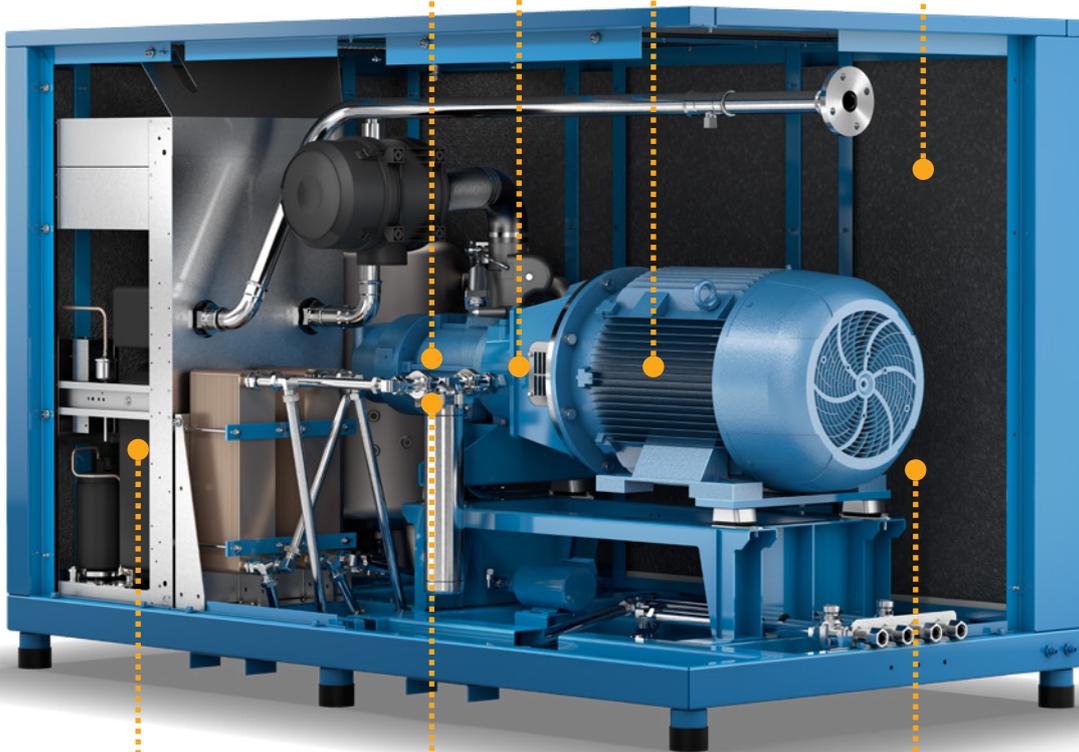

Suitable controllers:

**AIR CONTROL P**



Standard

**AIR CONTROL HE**



Optional

# LENTO



LENTO 15 - 55, air-cooled

50 Hz speed controlled - water cooling							
LENTO	Operating overpressure	Volume flow acc. to ISO 1217 (Annex C-2009)*		Rated motor power	Length	Width	Height
		min.	max.				
	bar	m <sup>3</sup> /min	m <sup>3</sup> /min	kW	mm	mm	mm
15	5-12	0.73	2.42	15	1880	850	1660
18	5-12	0.73	2.99	18,5	1880	850	1660
22	5-12	0.73	3.51	22	1880	850	1660
30	5-12	0.73	4.23	30	1880	850	1660
31	5-10	2.04	5.08	30	2300	1400	1560
37	5-10	2.04	6.14	37	2300	1400	1560
45	5-10	2.04	7.13	45	2300	1400	1560
55	5-10	2.04	8.19	55	2300	1400	1560
46	5-10	2.49	7.36	45	2750	1400	1769
56	5-10	2.49	9.58	55	2750	1400	1769
75	5-10	2.49	12.46	75	2750	1400	1769
76	5-12	4.26	12.92	75	3580	1600	1930
90	5-12	4.26	15.79	90	3580	1600	1930
110	5-12	4.26	20.01	110	3580	1600	1930

\* related to operating overpressure 7 bar at 50 Hz



LENTO 46 - 110

## 50 Hz Speed controlled - Air cooling

LENTO	Operating overpressure bar	Volume flow acc. to ISO 1217 (Annex C-2009)*		Rated motor power kW	Length mm	Width mm	Height mm
		min. m <sup>3</sup> /min	max. m <sup>3</sup> /min				
15	5-12	0.73	2.42	15	1880	850	1985
18	5-12	0.73	2.99	18.5	1880	850	1985
22	5-12	0.73	3.51	22	1880	850	1985
30	5-12	0.73	4.23	30	1880	850	1985
31	5-10	1.98	5.00	30	2300	1400	2265
37	5-10	1.98	6.00	37	2300	1400	2265
45	5-10	1.98	6.94	45	2300	1400	2265
55	5-10	1.98	7.88	55	2300	1400	2265
46	5-10	2.49	7.36	45	2750	1400	2328
56	5-10	2.49	9.58	55	2750	1400	2328
75	5-10	2.49	12.46	75	2750	1400	2328

\* related to operating overpressure 7 bar at 50 Hz



**ALMiG Kompressoren GmbH**  
Adolf-Ehmann-Straße 2  
73257 Köngen, Germany  
Tel: +49 (0)7024 9614-0  
info@almig.de

[www.almig.com](http://www.almig.com)



LENTD\_03/2024